

Container Hook VCH-SL-22 with Safety Locking Device


Artikel-Nr: 8502313



Suitable for ISO container edges. With a patented safety locking mechanism. A clevis connection for the 22 mm VIP chain. Using a VRG - 16 connector, the chain diameter can be reduced and thus a 16mm VIP - chain can be used . Attention: RUD-VCH 22-Hooks are not suitable for vertical lifting. Given a minimum inclination angle of 30° during the lifting process, the hook cannot automatically open. Connecting bolt and tensioning sleeve are pre-assembled.

Container Hook VCH-SL-22 with Safety Locking Device

Artikel-Nr: 8502313

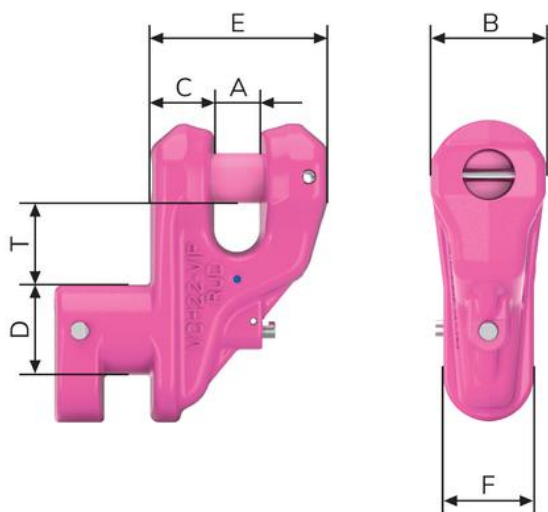

weight	4.22 kg	9.30 lbs
Nominal WLL	20000 kg	44000 lbs
T	45 mm	1-25/32"
A	24 mm	15/16"
B	62 mm	2-7/16"
C	48 mm	1-7/8"
D	50 mm	1-31/32"
E	100 mm	3-15/16"
F	50 mm	1-31/32"