

Lifting point B-ABA 1,6t - M10

Artikel-Nr: 7906266




B-ABA - Sturdy and resilient

- No rattling noise or shaking even at strong vibrations or shock loads, simple hinge of lifting means possible.
- Tested and certified by DGUV Testing specifications: GS-HM-36:2021-09 Certificate No.: HM 220054
- Clear marking of the minimum WLL for all loading directions.
- Clear marking at the bolt head: RUD, thread size, batch-no., class of strength.
- Original RUD bolt with special corrosion protection Corrud-DT available as spare part.
- Available as: Standard Metric Thread (DIN EN 13)
- Patented markings for easy determination for withdraw of service.
- Pink powder coated surface.
- Significant product characteristics of the B-ABA are subject to property right claims.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Lifting point B-ABA 1,6t - M10

Artikel-Nr: 7906266

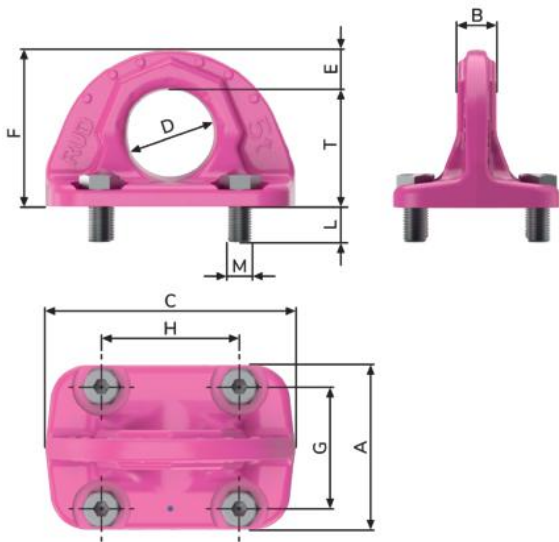

weight	0.88 kg	1.94 lbs
Nominal WLL	1600 kg	3520 lbs
T	47 mm	1-7/8"
A	75 mm	2-15/16"
B	16 mm	5/8"
C	100 mm	3-15/16"
D	35 mm	1-3/8"
E	16 mm	5/8"
F	62,5 mm	null
G	55 mm	2-5/32"
H	55 mm	2-5/32"
L	13 mm	1/2"
M	M10 mm	M10