

ICE-Balancer IW-16

Artikel-Nr: 7904255



ICE-Balancers will be installed into 4-leg sling assemblies (2x 2-leg), to achieve an equal load distribution to all 4 legs. The length tolerances of the single legs will be compensated.

You can calculate with 4 load bearing strands if the following criteria are fulfilled (DGUV-rule 109-017):


- Two 2-leg slings, thereof one sling with a balancer.
- Both 2-leg slings will be attached to one hook (single or double crane hook)
- Symmetrical load spreading
- Max. inclination angle β 45°

Other important RUD specific information and specialities to our ICE-Balancers can be found in the specific user instruction !

- Connection for balancer at top: connection by shackle
- Connection for balancer at bottom: ICE-Connectors
- Easy visibility of the critical inclined position of 10° by the special shape at the bottom side of the balancer
- Powder coated in ICE pink
- For detailed information regarding the ICE-Balancer, please refer to the operation Manual
- Including RUD-ID-Point®.

ICE-Balancer IW-16

Artikel-Nr: 7904255

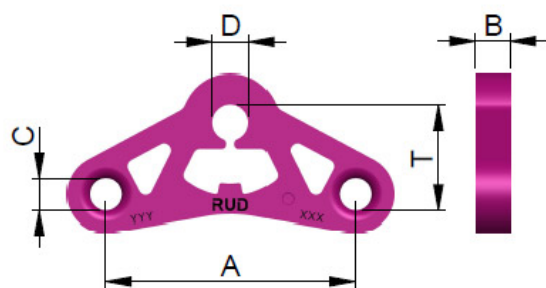

weight	8.80 kg	19.40 lbs
T	120 mm	4-3/4"
A	300 mm	11-13/16"
B	35 mm	1-3/8"
C	32 mm	1-1/4"
D	41 mm	1-5/8"