

INOX-STAR®-Eyebolt M24

Artikel-Nr: 7993838





- Body and bolt made out of Duplex Steel 1.4462 (high resistancy in sea water and in environment with a high concentration of chlorine ions).
- Pentagonal shape for a clear determination to common lifting points (i.e. eye bolts).
- Lifting points pivots 360° for an easy adjustment in load direction.
- Clear marking of the minimum WLL for all loading directions. Higher WLL possible when location and installation is optimised (compare WLL chart).
- Non removable special bolt (this reduces the risk of non standard bolts).
- Clear marking at the bolt head: RUD, thread size, batch-no., class of strength.
- Available as: Standard Metric Thread (DIN EN 13)
- Variable thread lengths are available for usage at thread holes and at through hole fixtures.
- Quick and easy installation with just one bolt connection.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- For permanent installation and recurrend lifts we can offer a special socket wrench to apply the requested torque (fits to a common Inch torque wrench).

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

INOX-STAR®-Eyebolt M24

Artikel-Nr: 7993838

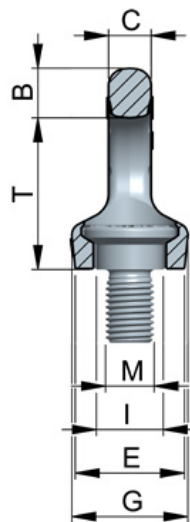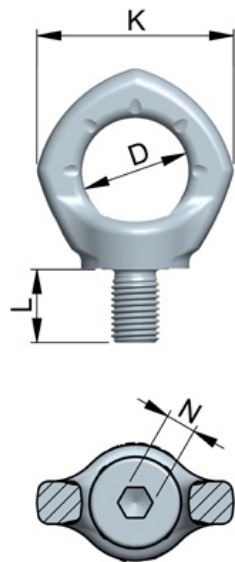

weight	0.92 kg	2.03 lbs
Nominal WLL	2500 kg	5500 lbs
T	70 mm	2-23/32"
B	24 mm	15/16"
C	19 mm	3/4"
D	48 mm	1-7/8"
E	51 mm	1-31/32"
G	56 mm	2-3/16"
I	33 mm	1-3/8"
K	92 mm	3-5/8"
L	36 mm	1-27/64"
M	M24 mm	M24
N	14 mm	9/16"