

Excavator hook welded VABH-W 2,5t

Artikel-Nr: 7991209




Used as a lifting point for spreader bars, wire rope slings, round slings, lifting means: oval suspension ring.

- Can be combined with most commercial lifting means without additional connecting element.
- Patented markings for easy determination for withdraw of service.
- Robust, forged safety latch.
- Phosphated surface.
- Weld-on point can be used as excavator hook.
- Simple and fast welding installation.
- Material of weld-on-block 1.6541 (23MnNiCrMo52) Weld: Kehlnaht 5 (please observe user instruction).
- Area of application in ring plane: 150°, Area of application at lateral load: +45°, -45°
- corresponds with the test criteria: "GS-HM-36"

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Excavator hook welded VABH-W 2,5t

Artikel-Nr: 7991209

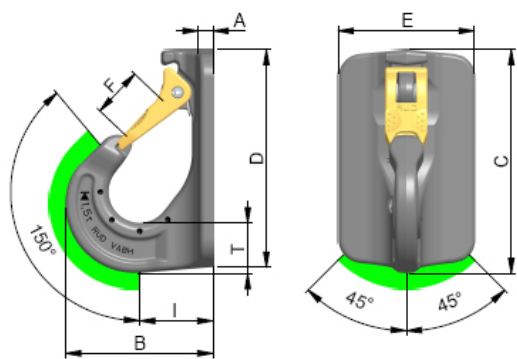

weight	1.67 kg	3.68 lbs
Nominal WLL	2500 kg	5500 lbs
T	33 mm	1-5/16"
A	8,5 mm	11/32"
B	98 mm	3-27/32"
C	148 mm	5-13/16"
D	143 mm	5-5/8"
E	85 mm	3-11/32"
F	28 mm	1-1/8"
I	49 mm	1-15/16"