

Load ring VLBG-PLUS 7t M36 with special-bolt

Artikel-Nr: 8500829




- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectively flat design if turned down.
- **Clear marking of the minimum WLL** for all loading directions.
- Available as:
 - Standard Metric Thread (DIN EN 13)
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.
- corresponds with the test criteria: "GS-HM-36"

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Load ring VLBG-PLUS 7t M36 with special-bolt

Artikel-Nr: 8500829

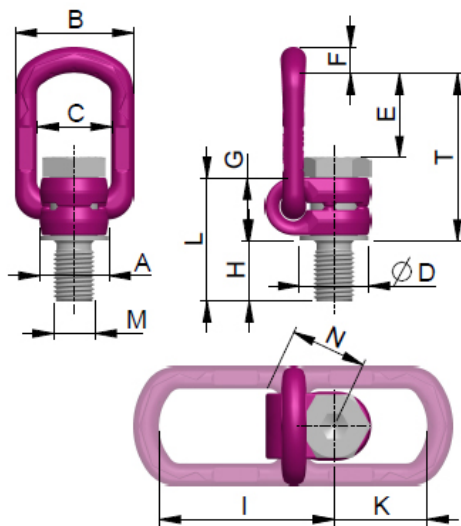

weight	3.40 kg	7.50 lbs
Nominal WLL	7000 kg	15430 lbs
T	146 mm	5-3/4"
A	60 mm	2-3/8"
B	103 mm	4-1/16"
C	65 mm	2-9/16"
D	60 mm	2-3/8"
E	74 mm	2-29/32"
F	22,5 mm	7/8"
G	55 mm	2-5/32"
H	52 mm	2-1/16"
I	151 mm	5-15/16"
K	80 mm	3-1/8"
L	107 mm	4-7/32"
M	M36 mm	M36
N	67 mm	2-5/8"