



POMMIER
innovative solutions for trucks



OXZY

PLUG & PLAY VENTILATION DOOR

The OXZY ventilation door improves ventilation in trailers and vehicle bodies of temperature-controlled trucks while maintaining the interior temperature of the vehicle. This equipment combines ruggedness with safety and performance, in addition to enhanced thermal insulation and sealing.


PATENTED



Secured and optimized vent grid and housing

ROBUST AND DURABLE VENTILATION

Made of a plastic material with high mechanical properties, rated IK10, OXZY was designed to guarantee optimal impact resistance. Capable of delivering a ventilation rate up to 300 m³/hr at 80 km/hr and equipped with an anti-insect mesh, and an inner stainless steel grid compliant with the requirements of TIR regulation, OXZY offers the best compromise between body ventilation and cargo security.



Interlocking adjustable frames

EASY INSTALLATION ON PANELS FROM 60 TO 110 MM



A clever patented system of interlocking frames allows direct mounting on panels with thickness between 60 and 110 mm. Supplied ready for installation, the OXZY ventilation door is also available as a decompression trap for partition walls of 45 mm thickness.



Reinforced gasket and insulated housing


IMPROVED THERMAL INSULATION AND WATER RESISTANCE

Thanks to the combination of a specially designed seal and the addition of a low thermal conductivity material, the OXZY ventilation door guarantees to be water-tight with enhanced thermal insulation similar to body walls.

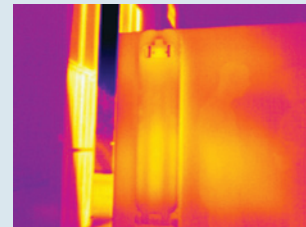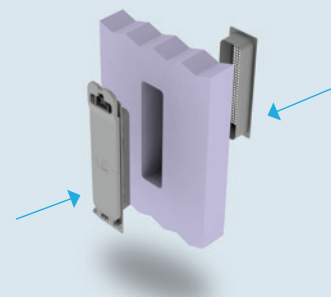

DIMENSIONS AND CHARACTERISTICS

Ventilation door kit

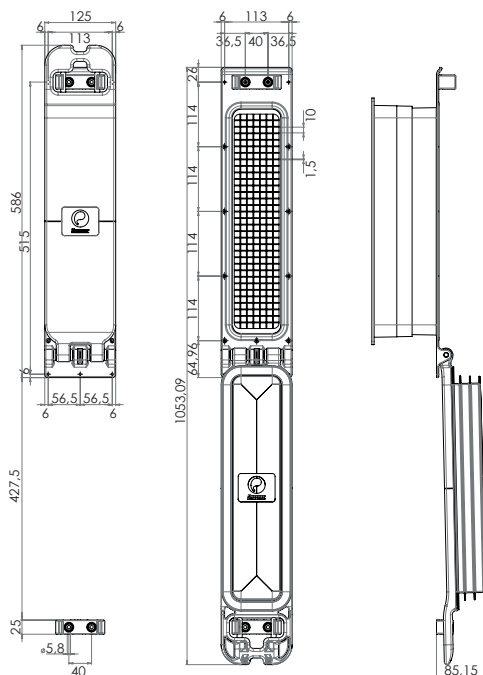


Telescopic pole

ERGONOMIC AND SECURE HANDLING

OXZY is designed to be compatible with upper installation on the front wall next to a large refrigeration unit. In this case to ensure handling without the risk of falling, we recommend a telescopic pole which has been specially designed to facilitate the opening and closing of OXZY.

Pole



Reference	Description	Material	Thickness of panel	Weight
240511758	Ventilation door	High resistance ABS & Stainless steel	Between 60 and 110 mm	2,7 kg
240511796	Decompression trap	High resistance ABS & Stainless steel	45 mm	2,7 kg
240511759	Telescopic pole	Aluminium & plastic	-	1,5 kg