

## Eye nut RM - M8

Artikel-Nr: 55255




For the RUD RM - eye nuts, the threaded connector component must be of at least quality grade 8.8

- Considerably higher WLL (in comparison to DIN 582) at vertical load.
- Large thread and WLL range (M6-M48, 0.1 t – 8 t).
- Clear marking of the minimum WLL for all loading directions.
- Quick and easy installation with just one bolt connection.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

# Eye nut RM - M8

Artikel-Nr: 55255

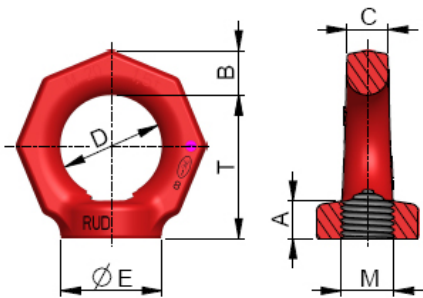

|             |         |          |
|-------------|---------|----------|
| weight      | 0.10 kg | 0.22 lbs |
| Nominal WLL | 200 kg  | 440 lbs  |
| T           | 34 mm   | 1-11/32" |
| A           | 11 mm   | 7/16"    |
| B           | 11 mm   | 7/16"    |
| C           | 10 mm   | 3/8"     |
| D           | 25 mm   | 63/64"   |
| E           | 25 mm   | 63/64"   |
| M           | M8 mm   | M8       |