

Load ring VLBG-PLUS 4,5t M24 with ICE-bolt

Artikel-Nr:

8504659




- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **optimal WLL with captive but exchangeable ICE-Bolt** made out of patented steel with special corrosion protection Corrud-DT. Non-hazardous deep temperature usage down to -60°; higher toughness and therefore higher bending strength as well as less wear occurrence. Original ICE-Bolt is available as a spare part. Clear marking at the bolt head: RUD, ICE, thread size, batchno., class of strength.
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectively flat design if turned down.
- **Clear marking of the minimum WLL for all loading directions**
- Available as:
 - Standard Metric Thread (DIN EN 13)
- Variable bolt lengths available for tapped or through holes.
- Tested and certified by DGUV Testing specifications: GS-HM-36:2021-09
Certificate No.: HM 220053
- DNV certification from size M30.
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Load ring VLBG-PLUS 4,5t M24 with ICE-bolt

Artikel-Nr: 8504659

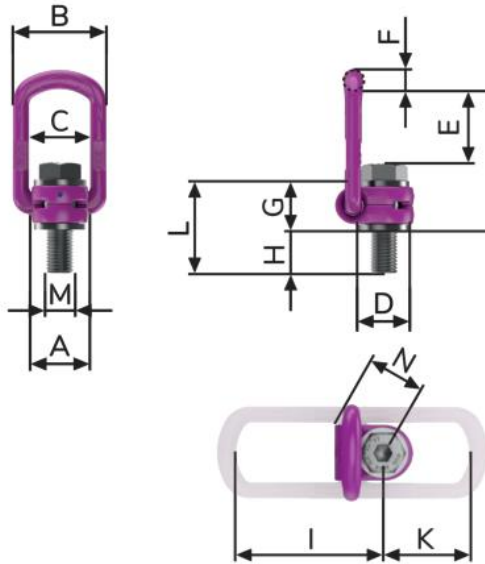

weight	1.40 kg	3.09 lbs
Nominal WLL	4500 kg	9920 lbs
T	125 mm	4-15/16"
A	50 mm	1-31/32"
B	82 mm	3-1/4"
C	54 mm	2-1/8"
D	45 mm	1-25/32"
E	67 mm	2-5/8"
F	17 mm	23/32"
G	43 mm	1-11/16"
H	37 mm	1-7/16"
I	130 mm	5-1/8"
K	78 mm	3-1/16"
L	80 mm	3-1/8"
M	M24 mm	M24
N	48 mm	1-7/8"