

## PowerPoint WPP-S-4t

Artikel-Nr: 7989946




Weldable universal hook connection for ring assemblies, round slings, wire ropes, hook assemblies

- Can be combined with most commercial lifting means without additional connecting element.
- Double ball bearing is the optimal solution for turning and flipping operations under full load.
- Lifting points pivots 360°.
- Parallel to the weld-on surface under nominal WLL.
- Large distance between bolt-on surface and load to avoid damage.
- Ideal connection link for crossbar construction.
- Lowest kinking possibility due to cardan joint.
- Clear marking of the minimum WLL for all loading directions.
- Requirements of the DIN 18800 are fulfilled by the weld arrangement (circular fillet weld), this means non occurrence of contact/crevice corrosion due to the endless weld seam (therefore suitable for outdoor constructions). The circular weld seam HY 3 + 6 requires only a small welding volume.
- Compact design and high wear resistancy due to the usage of high tensile material. ●Material of weld-on-block 1.6541 (23MnNiCrMo52) (please observe user instruction).
- The WLL statement corresponds to the minimum WLL in all loading directions. Higher WLL possible when location and installation is optimised (compare WLL chart).
- Significant product characteristics of the WPP-S, WPP-B, WPP-VIP, WPPH-S, WPPH-B and WPPH-VIP are subject to property right claims.
- Component according to the test criterias of DGUV "GS-HM-36".
- Simple and fast welding installation.

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

PowerPoint WPP-S-4t

Artikel-Nr: 7989946

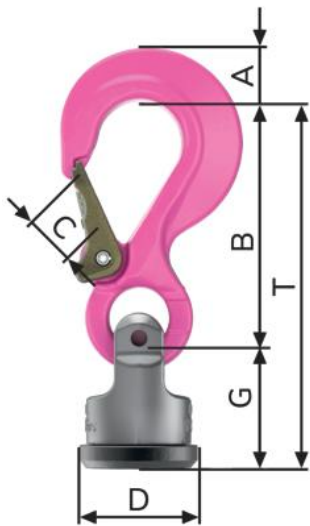

|             |         |          |
|-------------|---------|----------|
| weight      | 3.40 kg | 7.50 lbs |
| Nominal WLL | 4000 kg | 8820 lbs |
| T           | 227 mm  | 8-15/16" |
| A           | 36 mm   | 1-27/64" |
| B           | 150 mm  | 5-7/8"   |
| C           | 35 mm   | 1-3/8"   |
| D           | 78 mm   | 3-1/16"  |
| G           | 77 mm   | 3"-1/32" |