

# System 2000

## Fittings for PE and PVC pipes




| Ø pipe A | Ø B | L   | E1  | E2  | H     | Weight |
|----------|-----|-----|-----|-----|-------|--------|
| 63       | 63  | 236 | 83  | 83  | 118   | 6,0    |
| 75       | 75  | 250 | 85  | 85  | 125   | 7,7    |
| 90       | 90  | 268 | 85  | 85  | 134   | 9,0    |
| 110      | 63  | 240 | 85  | 80  | 140   | 7,7    |
|          | 90  | 270 | 85  | 85  | 145   | 8,9    |
|          | 110 | 290 | 85  | 85  | 145   | 9,2    |
| 125      | 90  | 274 | 87  | 85  | 150   | 10,4   |
|          | 110 | 294 | 97  | 85  | 150   | 10,7   |
|          | 125 | 306 | 90  | 90  | 153   | 15,0   |
| 140      | 90  | 288 | 93  | 85  | 157,5 | 12,2   |
|          | 110 | 305 | 93  | 85  | 160   | 12,5   |
|          | 140 | 344 | 96  | 96  | 167   | 19,0   |
| 160      | 90  | 310 | 105 | 85  | 170   | 14,0   |
|          | 110 | 330 | 105 | 85  | 170   | 14,5   |
|          | 125 | 380 | 107 | 90  | 170   | 19,8   |
|          | 160 | 380 | 105 | 105 | 190   | 16,5   |
| 180      | 125 | 360 | 113 | 87  | 180   | 24,0   |
|          | 180 | 415 | 113 | 113 | 207,5 | 29,0   |
| 200      | 200 | 460 | 128 | 128 | 230   | 35,0   |
| 225      | 90  | 356 | 128 | 85  | 200   | 29,5   |
|          | 110 | 376 | 128 | 128 | 200   | 30,0   |
|          | 225 | 488 | 130 | 130 | 244   | 55,0   |

### All socket tee

#### No. 8515

equal and reduced side outlet




| Order No. | MOP (PN) | Dimension Ø pipe |    |    |    |     |     |     |     |     |     |     |
|-----------|----------|------------------|----|----|----|-----|-----|-----|-----|-----|-----|-----|
|           |          | Ø pipe A         | 63 | 75 | 90 | 110 | 125 | 140 | 160 | 180 | 200 | 225 |
| 8515      | 16       | Ø pipe B         | 63 | 75 | 90 | 63  | 90  | 90  | 90  | 125 | 90  |     |
|           |          |                  |    |    |    | 90  | 110 | 110 | 110 | 200 |     | 110 |
|           |          |                  |    |    |    | 110 | 125 | 140 | 160 | 180 | 225 |     |

| Ø pipe A | DN  | L   | E   | H   | Weight |
|----------|-----|-----|-----|-----|--------|
| 63       | 50  | 236 | 83  | 100 | 8,0    |
| 75       | 65  | 250 | 85  | 110 | 9,0    |
| 90       | 80  | 268 | 85  | 140 | 11,0   |
| 110      | 50  | 240 | 85  | 150 | 10,0   |
|          | 80  | 270 | 85  | 150 | 11,5   |
|          | 100 | 290 | 85  | 150 | 12,0   |
| 125      | 80  | 274 | 87  | 160 | 14,0   |
|          | 100 | 294 | 87  | 160 | 14,0   |
|          | 80  | 288 | 93  | 170 | 15,0   |
| 140      | 100 | 308 | 93  | 170 | 15,5   |
|          | 125 | 334 | 93  | 170 | 16,0   |
|          | 80  | 300 | 105 | 180 | 16,5   |
| 160      | 100 | 320 | 105 | 180 | 17,0   |
|          | 150 | 380 | 105 | 180 | 20,0   |
|          | 80  | 310 | 113 | 200 | 23,0   |
| 180      | 150 | 415 | 113 | 200 | 31,0   |
|          | 200 | 480 | 130 | 220 | 47,0   |
| 225      | 80  | 356 | 130 | 220 | 33,5   |
|          | 100 | 376 | 130 | 220 | 33,0   |
|          | 200 | 488 | 130 | 230 | 55,0   |

### Double socket tee

#### No. 8525

with flanged branch  
equal and reduced side outlet

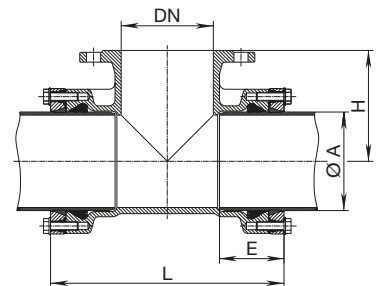

| Order No. | MOP (PN) | DN | Ø pipe A |    |    |     |     |     |     |     |     |     |
|-----------|----------|----|----------|----|----|-----|-----|-----|-----|-----|-----|-----|
|           |          |    | 63       | 75 | 90 | 110 | 125 | 140 | 160 | 180 | 200 | 225 |
| 8525      | 16       | DN | 50       | 65 | 80 | 50  | 80  | 80  | 80  | 80  | 200 | 80  |
|           |          |    |          |    |    | 80  | 100 | 100 | 100 | 150 |     | 100 |
|           |          |    |          |    |    | 100 |     | 125 | 150 | 200 |     | 200 |