

## Excavator hook welded VCGH-S 16

Artikel-Nr: 7984047




Used as a lifting point for spreader bars, wire rope slings, round slings, lifting means: oval suspension ring.

- Can be combined with most commercial lifting means without additional connecting element.
- Patented markings for easy determination for withdraw of service.
- Robust, forged safety latch.
- Phosphated surface.
- Weld-on point can be used as excavator hook.
- Simple and fast welding installation.
- The weld-on-block is made (forged) out of quality weldable steel. Weld: Kehlnaht 8
- Area of application in ring plane: 45°, Area of application at lateral load: +15°, -15°
- corresponds with the test criteria: "GS-HM-36"

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Excavator hook welded VCGH-S 16

Artikel-Nr: 7984047

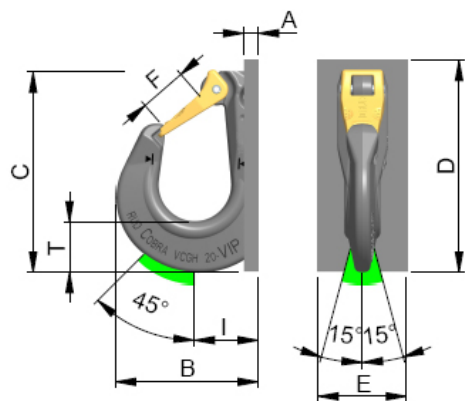

|             |          |           |
|-------------|----------|-----------|
| weight      | 5.67 kg  | 12.50 lbs |
| Nominal WLL | 10000 kg | 22040 lbs |
| T           | 49 mm    | 1-15/16"  |
| A           | 15 mm    | 19/32"    |
| B           | 141 mm   | 5-9/16"   |
| C           | 200 mm   | 7-7/8"    |
| D           | 220 mm   | 8-11/16"  |
| E           | 100 mm   | 3-15/16"  |
| F           | 48 mm    | 1-7/8"    |
| I           | 70 mm    | 2-3/4"    |
| N           | 16 mm    | null      |