

Load ring VLBG-2,5t-M20 with 10.9 bolt


Artikel-Nr: 7908057



- WLL range 0.3 t – 4 t.
- Captive but replaceable 10.9 screw.
- Clamping spring has a noise-dampening effect and keeps the hanging eye in the desired direction; This makes it easy to hook in the sling or flat design when folded down.
- DNVGL certification is compliant with:
DNV GL standard DNVGL-ST-0377 - Standard for shipboard lifting appliances
DNV GL standard DNVGL-ST-0378 - Standard für offshore and platform lifting appliances.

Load ring VLBG-2,5t-M20 with 10.9 bolt

Artikel-Nr: 7908057

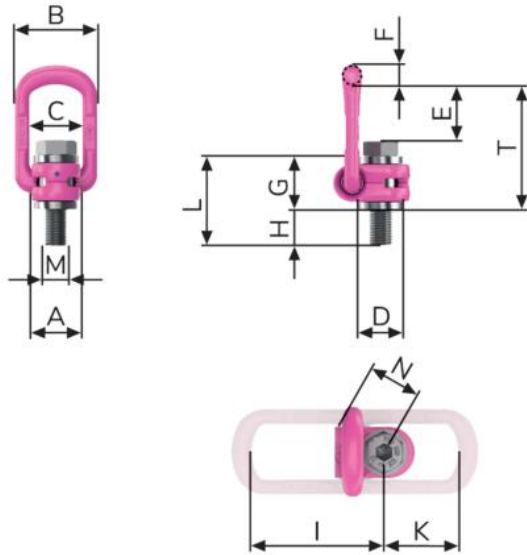

weight	1.30 kg	2.87 lbs
Nominal WLL	2500 kg	5500 lbs
T	110 mm	4-11/32"
A	50 mm	1-31/32"
B	82 mm	3-1/4"
C	54 mm	2-1/8"
D	45 mm	1-25/32"
E	55 mm	2-5/32"
F	16,5 mm	21/32"
G	43 mm	1-11/16"
H	32 mm	1-1/4"
I	113 mm	4-7/16"
K	64 mm	2-1/2"
L	75 mm	2-15/16"
M	M20 mm	M20
N	48 mm	1-7/8"