



Remote Control Ø16 UL-RC



- Assembly instructions
- Notice de montage
- Einbauanleitung
- Istruzioni di montaggio
- Instrucciones de montaje

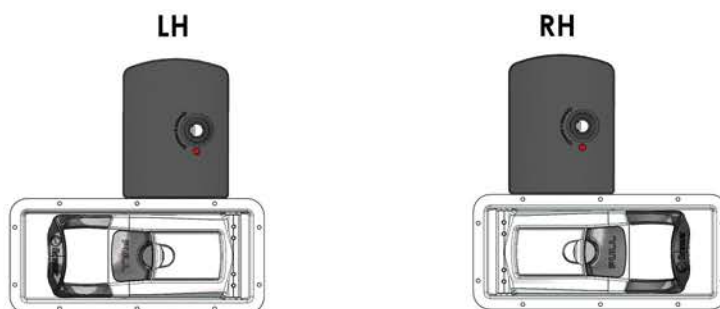



Remote Control Ø16 UL-RC



Not supplied

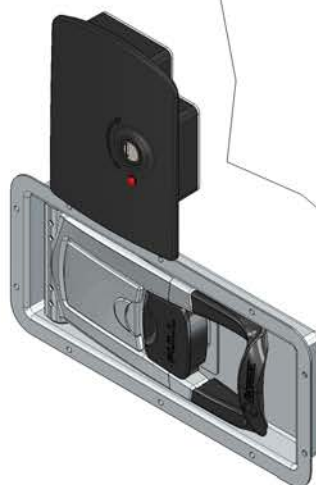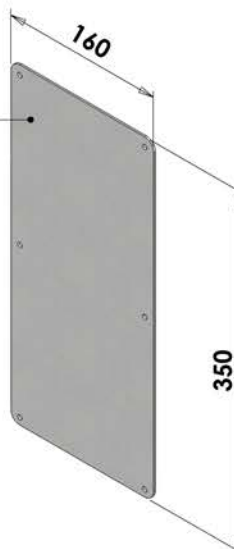

020911647
TORSEO Ø16
UL-RC

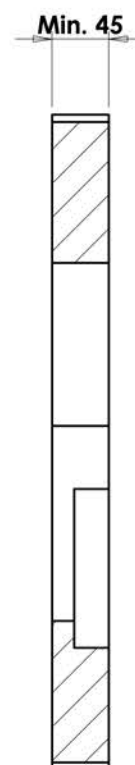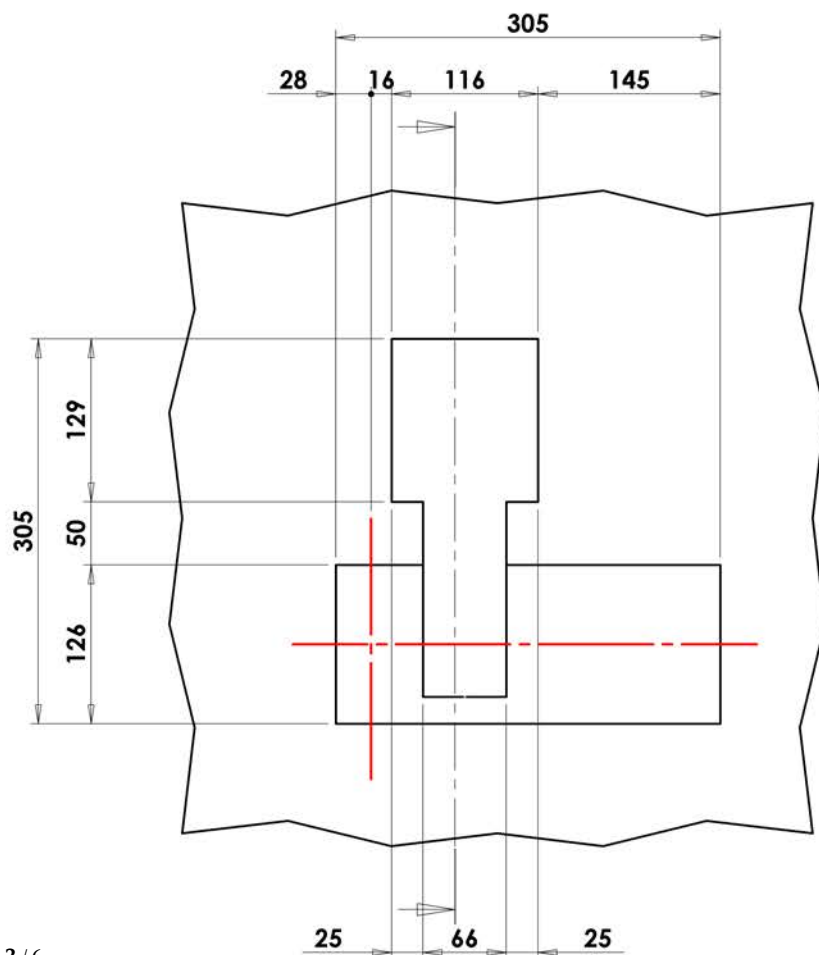

Control Unit M325 - Connections




Disconnect
the battery




Technical Specifications

Power Supply	12Vcc
Current Absorption	<2mA
Transmission distance	8m
Working temperature	-25°C/85°C
Max current through c/locking relay	10 A

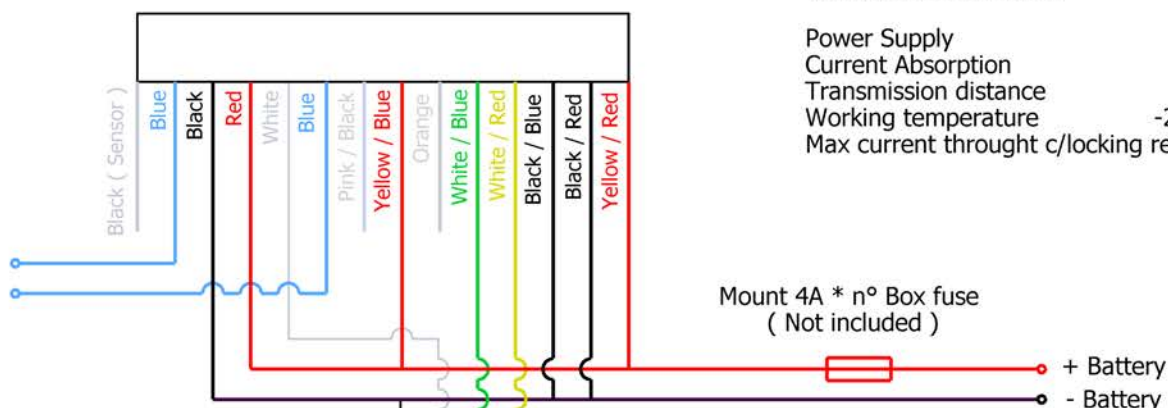


Direction indicators

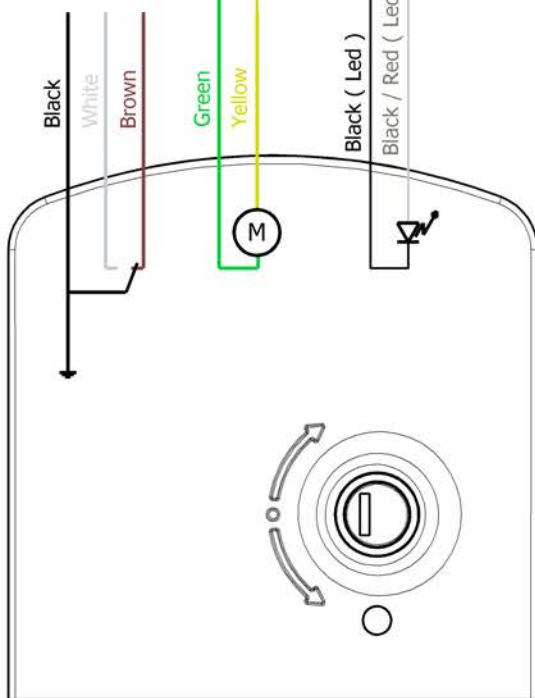


Second box
(Max two box)

Bullet
Connector
4mm

Turn the key up (open)




Fix the tongue vertical (open)



	Yellow	Green	Black	White	Brown
Extend out	--	+	○	○	○
Retract	+	--	○	○	

Control Unit HPA 3.0 - Connections

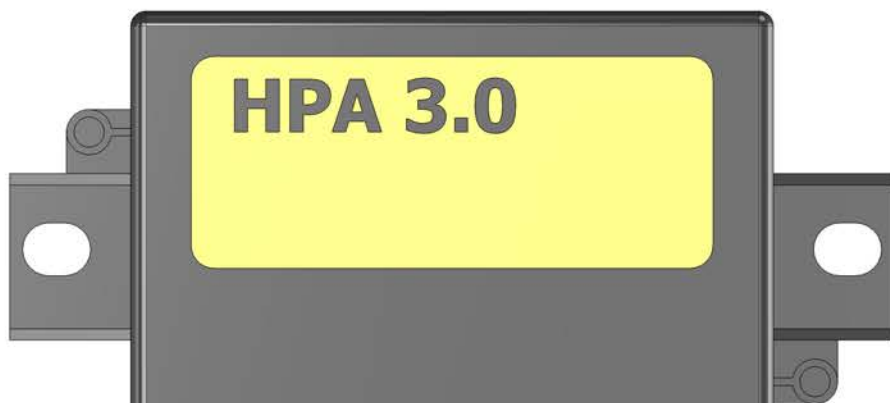


Disconnect the battery




Technical Specifications


Power Supply	12Vcc
Current Absorption	3mA
Transmission distance	8m
Working temperature	-25°C/85°C
Max current through c/locking relay	10 A

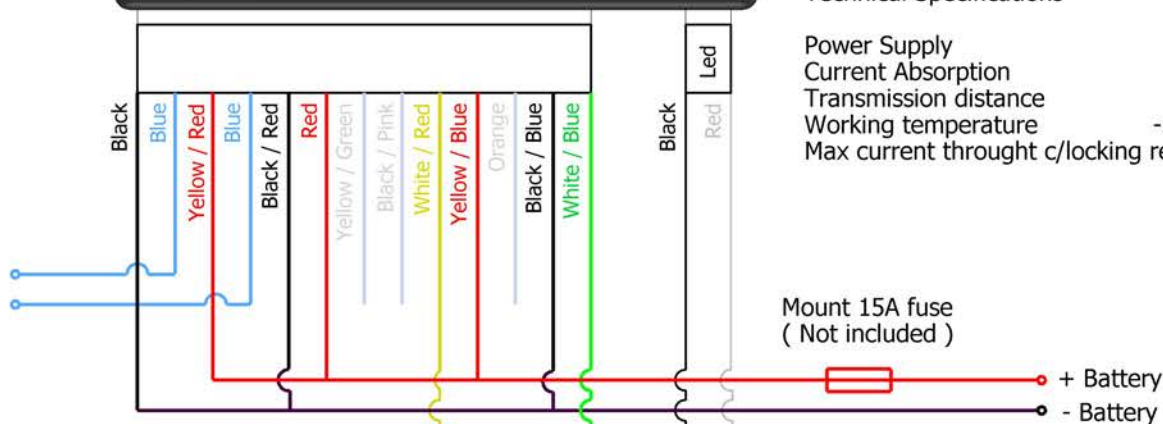


Direction indicators

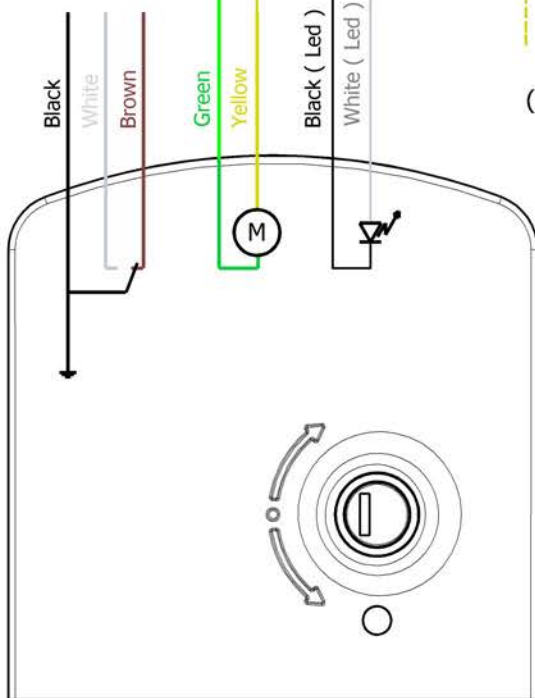

Turn the key up (open)



Fix the tongue vertical (open)



	Yellow	Green	Black	White	Brown
Extend out	--	+	○	○	○
Retract	+	--	○	○	


Power Relay Board - Connections

Connectors used: Fast-On 6.35mm


Operating temperature: -40°C +85°C

Switchable voltage: 16V DC

Switchable current: 30A

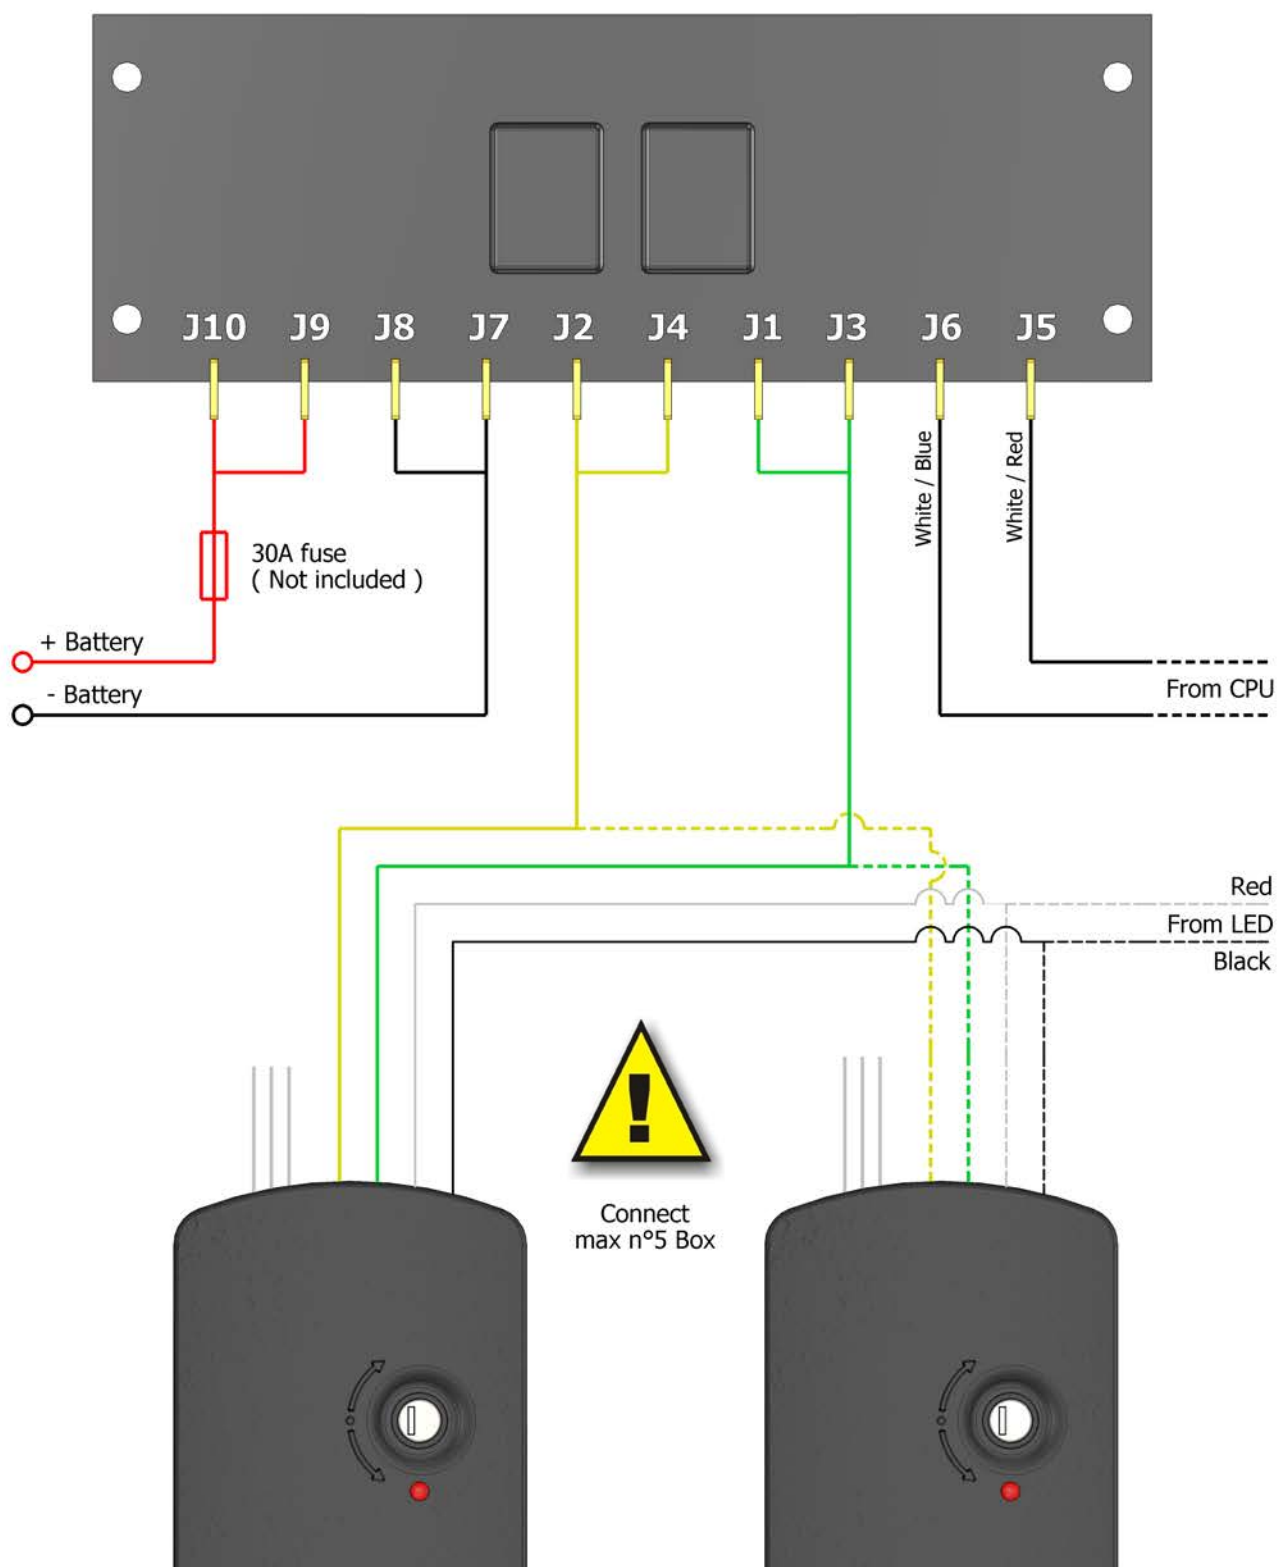

Voltage Reducer - Connections

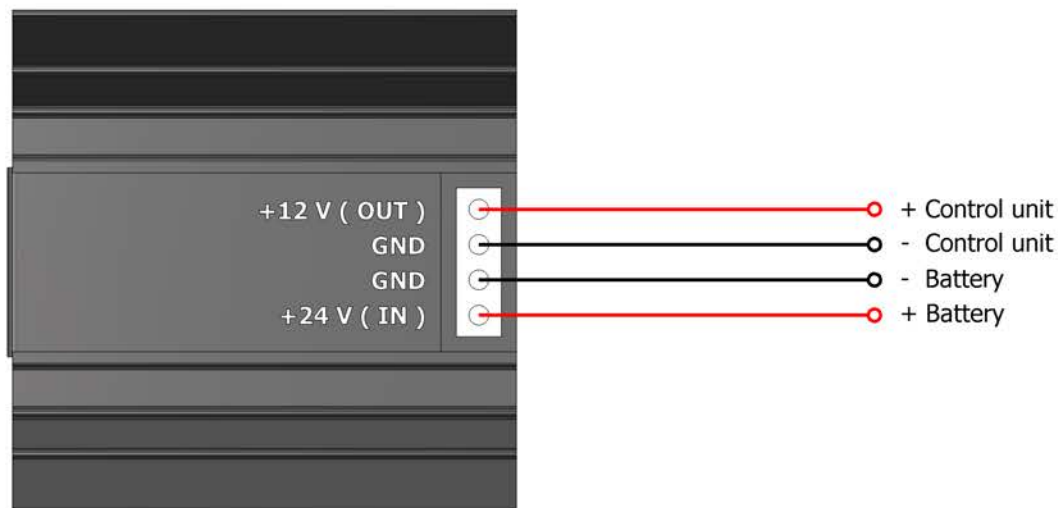

Supports max n°2 box

Input voltage = 20-30 V DC
Output voltage = 13.8 V DC
Max current = 10 A