

Eye Plate for bolting RBG-3

Artikel-Nr: 51817



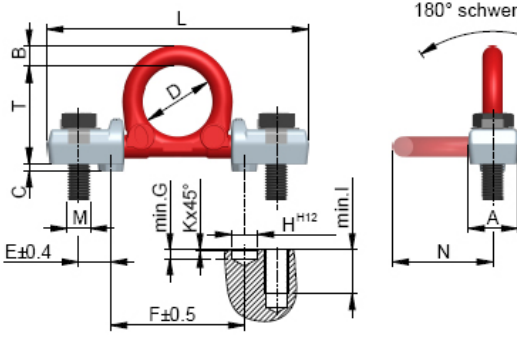
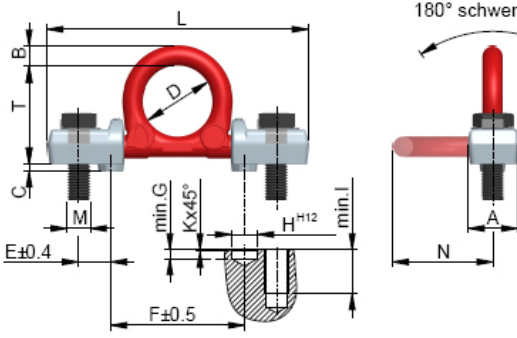
Load ring threaded with full working load in all directions and split force introduction.

- Split force introduction due to multiple point fixing.
- Suspension ring pivots 180°.
- 100% WLL at 90 degrees in the load ring plane possible.
- Clear marking of the minimum WLL for all loading directions.
- Original RUD bolt available as spare part.
- Component according to the test criterias of DGUV "GS-HM-36".
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Eye Plate for bolting RBG-3

Artikel-Nr: 51817

	weight	1.07 kg	2.36 lbs
	Nominal WLL	3000 kg	6610 lbs
	T	67 mm	2-5/8"
	A	34 mm	1-11/32"
	B	16 mm	5/8"
	C	5 mm	13/64"
	D	48 mm	1-7/8"
	E	22 mm	7/8"
	F	92 mm	3-5/8"
	G	6 mm	15/64"
	H	18 mm	23/32"
	I	30 mm	1-3/16"
	K	1 mm	3/64"
	L	178 mm	7"
	M	M16 mm	M16
	N	71 mm	2-13/16"