

VWBG-V 2t-M20 : anneau émerillon à maillon, vis longueur standard

Artikel-Nr: 7100800




- Ball bearing for a shock-free rotating and turning with less friction.
- Lifting points pivots 360°.
- Suspension ring with enlarged pivoting area.
- Comprehensive range of threads and WLL (M8 – M30 bzw. 0,3 t – 5 t).
- Available as:
 - Standard Metric Thread (DIN EN 13)
 - Metric Fine Thread (DIN EN 13)
 - Coarse Pitch Thread UNC (ANSI B1.1)
- Clear marking of the minimum WLL for all loading directions. Higher WLL possible when location and installation is optimised(compare WLL chart / product information).
- Patented markings for easy determination for withdraw of service as well as the determination of the load angle.
- Rotatable at nominal WLL, 90° to the bolt-on direction.
- Variable bolt lengths available for tapped or through holes.
- Large distance between bolt-on surface and load to avoid damage.
- Non removable special bolt (this reduces the risk of improper standard bolts).
- Tested and certified by DGUV Testing specifications: GS-HM-36:2021-09
Certificate No.: HM 220055
- Quick and easy installation with just one bolt connection.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

VWBG-V 2t-M20 : anneau émerillon à maillon, vis longueur standard

Artikel-Nr: 7100800

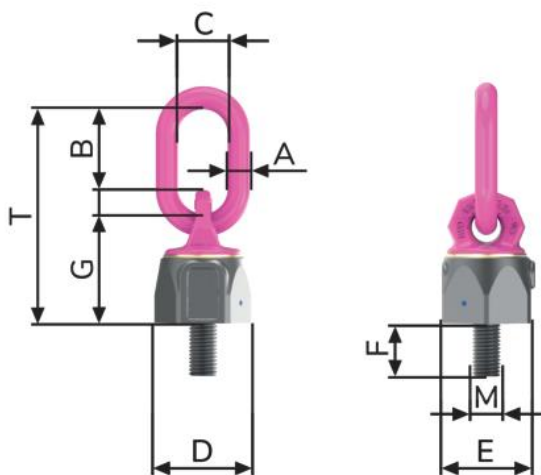

poids	1.42 kg	3.13 lbs
CMU	2000 kg	4400 lbs
T	137 mm	5-3/8"
A	13 mm	1/2"
B	54 mm	null
null	2-1/8"	null
C	35 mm	1-3/8"
D	62 mm	2-7/16"
E	55 mm	2-5/32"
F	33 mm	1-5/16"
G	67 mm	2-5/8"
M	M20 mm	M20