

## Load ring VLBG-1,5t-M16 with 10.9 bolt


Artikel-Nr: 7908055



- WLL range 0.3 t – 4 t.
- Captive but replaceable 10.9 screw.
- Clamping spring has a noise-dampening effect and keeps the hanging eye in the desired direction; This makes it easy to hook in the sling or flat design when folded down.
- DNVGL certification is compliant with:  
DNV GL standard DNVGL-ST-0377 - Standard for shipboard lifting appliances  
DNV GL standard DNVGL-ST-0378 - Standard für offshore and platform lifting appliances.

# Load ring VLBG-1,5t-M16 with 10.9 bolt

Artikel-Nr: 7908055

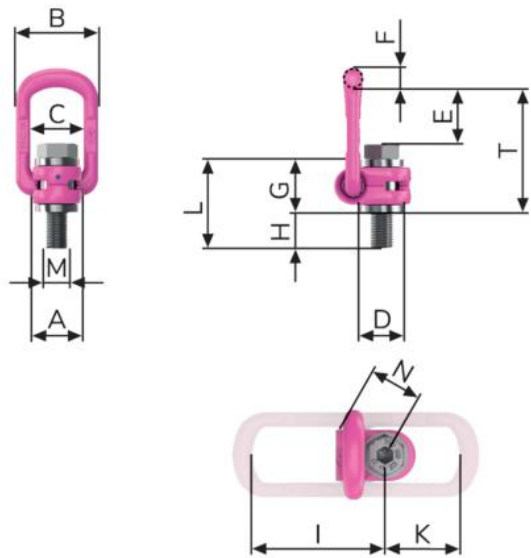

|             |         |          |
|-------------|---------|----------|
| weight      | 0.55 kg | 1.21 lbs |
| Nominal WLL | 1500 kg | 3300 lbs |
| T           | 85 mm   | 3-11/32" |
| A           | 33 mm   | 1-5/16"  |
| B           | 56 mm   | 2-3/16"  |
| C           | 36 mm   | 1-27/64" |
| D           | 30 mm   | 1-3/16"  |
| E           | 39 mm   | 1-9/16"  |
| F           | 13,5 mm | 17/32"   |
| G           | 36 mm   | 1-27/64" |
| H           | 24 mm   | 15/16"   |
| I           | 86 mm   | 3-3/8"   |
| K           | 47 mm   | 1-7/8"   |
| L           | 60 mm   | 2-3/8"   |
| M           | M16 mm  | M16      |
| N           | 38 mm   | 1-1/2"   |