

INOX-ABA 1,6t

Artikel-Nr: 7912397



Rigid weld-on-solutions make sense:

- For construction parts that are subject to constant rotary motion, strong vibrations and shocks;
- if the height of the lifting points does not cause obstruction;
- if the lifting means are to be suspended with only one hand.

The all-round loadable, stainless anchor point:

- Loadable from any direction as well as increased WLL in the plane of the ring.
- 4:1 safety against breaking.
- Wear markings at the inside and outside of the lift bail thus easily recognizable discard criteria.
- Closed and circumferential fillet weld thus no subcorrosion.
- Made of Duplex Steel 1.4462.


Thanks to its excellent resistance qualities, it also impresses in challenges such as in seawater and in environments dominated by a high concentration of chlorine ions. In industries such as Ship and container construction, petrochemicals, or even the paper and food industries, the INOX-ABA will be able to show off its strengths. Because of its excellent resistance to weather, it can also prove its advantages for many other applications.

DUPLEX STEEL 1.4462.

Duplex Steel is characterised by its good corrosion resistance against pitting and surface corrosion - also against seawater, water vapour, nitric acid and sulphuric acid. A smaller nickel content also makes it interesting from an environmental perspective.

INOX-ABA 1,6t

Artikel-Nr: 7912397

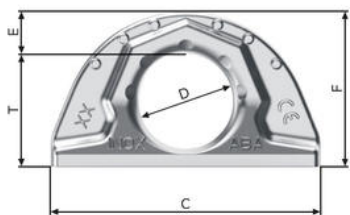

poids	0.45 kg	0.99 lbs
CMU	1600 kg	3520 lbs
T	42 mm	1-21/32"
A	30 mm	1-3/16"
B	16 mm	null
null	5/8"	null
C	100 mm	3-15/16"
D	35 mm	1-3/8"
E	16 mm	5/8"
F	57 mm	2-1/4"