

Load ring VLBG-0,63t-M10 with 10.9 bolt


Artikel-Nr: 7908053



- WLL range 0.3 t – 4 t.
- Captive but replaceable 10.9 screw.
- Clamping spring has a noise-dampening effect and keeps the hanging eye in the desired direction; This makes it easy to hook in the sling or flat design when folded down.
- DNVGL certification is compliant with:
DNV GL standard DNVGL-ST-0377 - Standard for shipboard lifting appliances
DNV GL standard DNVGL-ST-0378 - Standard für offshore and platform lifting appliances.

Load ring VLBG-0,63t-M10 with 10.9 bolt

Artikel-Nr: 7908053

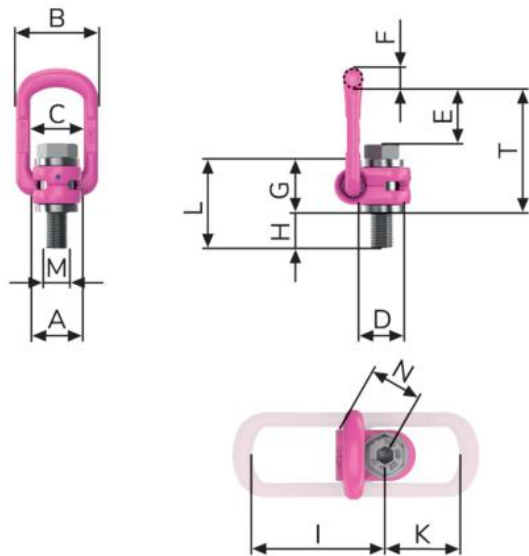

weight	0.31 kg	0.68 lbs
Nominal WLL	630 kg	1390 lbs
T	75 mm	2-15/16"
A	30 mm	1-3/16"
B	54 mm	2-1/8"
C	34 mm	1-11/32"
D	24 mm	15/16"
E	39 mm	1-9/16"
F	10 mm	3/8"
G	29 mm	1-5/32"
H	16 mm	5/8"
I	75 mm	2-15/16"
K	45 mm	1-25/32"
L	45 mm	1-25/32"
M	M10 mm	M10
N	32 mm	1-1/4"