

Eye Plate-threaded VRBG-16t

Artikel-Nr: 7993255




Load ring threaded with full working load in all directions and split force introduction.

- Split force introduction due to multiple point fixing.
- Suspension ring pivots 180°.
- 100% WLL at 90 degrees in the load ring plane possible.
- Clear marking of the minimum WLL for all loading directions.
- Patented markings for easy determination for withdraw of service.
- Original RUD bolt available as spare part.
- Component according to the test criterias of DGUV "GS-HM-36".
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Eye Plate-threaded VRBG-16t

Artikel-Nr: 7993255

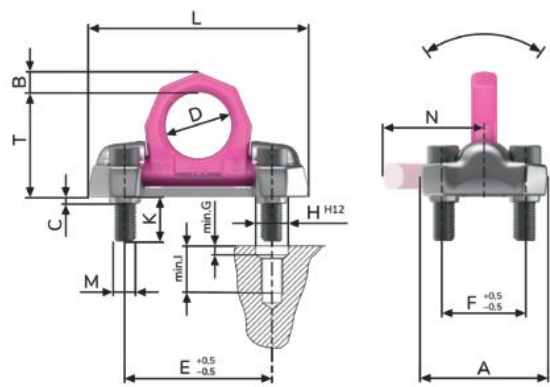

weight	11.37 kg	25.07 lbs
Nominal WLL	16000 kg	35270 lbs
T	131 mm	5-3/16"
A	170 mm	6-11/16"
B	30 mm	1-3/16"
C	8 mm	5/16"
D	90 mm	3-17/32"
E	198 mm	7-7/8"
F	104 mm	4-3/32"
G	10 mm	3/8"
H	46 mm	1-13/16"
I	70 mm	2-3/4"
K	63 mm	2-15/32"
L	270 mm	10-5/8"
M	M30 mm	M30
N	134 mm	5-9/32"