

Eye Plate, ready for welding VRBS-16t

Artikel-Nr: 7992491




- Split force introduction due to multiple point fixing.
- Suspension ring pivots 180°.
- 100% WLL at 90° in the load ring plane possible.
- Patented markings for easy determination for withdraw of service. Patented markings for determination of the load angle.
- Clear marking of the minimum WLL for all loading directions.
- The weld-on-block is made (forged) out of a quality weldable steel.
- Component according to the test criterias of DGUV "GS-HM-36".
- Simple and fast welding installation.
- Confirmation of the low temperature ability to -40°C by the notch bar impact test is possible upon request (before order is placed).

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Eye Plate, ready for welding VRBS-16t

Artikel-Nr: 7992491

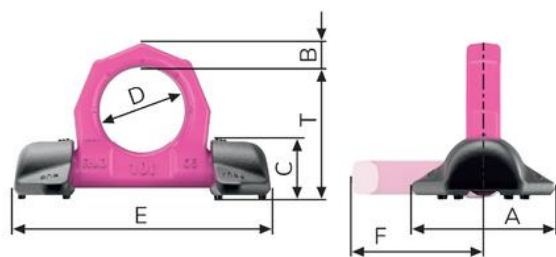

weight	5.53 kg	12.19 lbs
Nominal WLL	16000 kg	35270 lbs
T	127 mm	5"
A	130 mm	5-1/8"
B	30 mm	1-3/16"
C	57 mm	2-1/4"
D	90 mm	3-17/32"
E	263 mm	10-3/8"
F	134 mm	5-9/32"