

## VIP-Balancer VW-13

Artikel-Nr: 7904374




VIP-Balancers will be installed into 4-leg sling assemblies (2x 2-leg), to achieve an equal load distribution to all 4 legs. The length tolerances of the single legs will be compensated. You can calculate with 4 load bearing strands if the following criteria are fulfilled (DGUV rule 109-017):

- Two 2-leg slings, thereof one sling with a balancer.
- Both 2-leg slings will be attached to one hook (single or double crane hook)
- Symmetrical load spreading
- Max. inclination angle  $\beta$  45°

Other important RUD specific information and specialities to our VIP-Balancers can be found in the specific user instruction !

VIP-Balancer VW-13

Artikel-Nr: 7904374

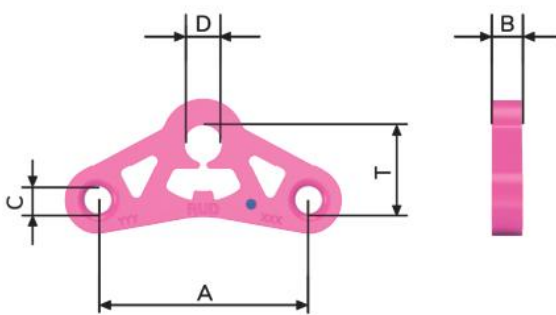

|        |         |          |
|--------|---------|----------|
| weight | 4.37 kg | 9.63 lbs |
| T      | 91 mm   | 3-9/16"  |
| A      | 240 mm  | 9-1/2"   |
| B      | 30 mm   | 1-3/16"  |
| C      | 28 mm   | 1-1/8"   |
| D      | 38 mm   | 1-1/2"   |