

## ICE-Balancer IW-6

Artikel-Nr: 7904367



ICE-Balancers will be installed into 4-leg sling assemblies (2x 2-leg), to achieve an equal load distribution to all 4 legs. The length tolerances of the single legs will be compensated.

You can calculate with 4 load bearing strands if the following criteria are fulfilled (DGUV-rule 109-017):


- Two 2-leg slings, thereof one sling with a balancer.
- Both 2-leg slings will be attached to one hook (single or double crane hook)
- Symmetrical load spreading
- Max. inclination angle  $\beta$  45°

Other important RUD specific information and specialities to our ICE-Balancers can be found in the specific user instruction !

- Connection for balancer at top: connection by shackle
- Connection for balancer at bottom: ICE-Connectors
- Easy visibility of the critical inclined position of 10° by the special shape at the bottom side of the balancer
- Powder coated in ICE pink
- For detailed information regarding the ICE-Balancer, please refer to the operation Manual
- Including RUD-ID-Point®.

ICE-Balancer IW-6

Artikel-Nr: 7904367

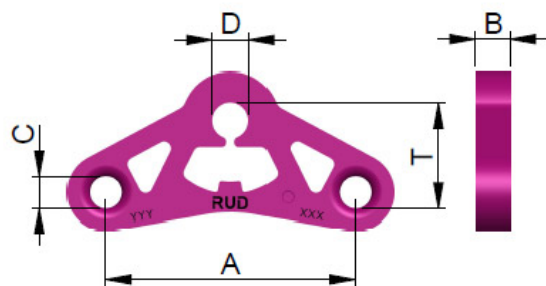

|        |         |          |
|--------|---------|----------|
| weight | 0.49 kg | 1.08 lbs |
| T      | 46 mm   | 1-13/16" |
| A      | 110 mm  | 4-11/32" |
| B      | 15 mm   | 19/32"   |
| C      | 14 mm   | 9/16"    |
| D      | 21 mm   | 13/16"   |