

Load ring VLBG-1t-M12 with 10.9 bolt


Artikel-Nr: 7908054



- WLL range 0.3 t – 4 t.
- Captive but replaceable 10.9 screw.
- Clamping spring has a noise-dampening effect and keeps the hanging eye in the desired direction; This makes it easy to hook in the sling or flat design when folded down.
- DNVGL certification is compliant with:
DNV GL standard DNVGL-ST-0377 - Standard for shipboard lifting appliances
DNV GL standard DNVGL-ST-0378 - Standard für offshore and platform lifting appliances.

Load ring VLBG-1t-M12 with 10.9 bolt

Artikel-Nr: 7908054

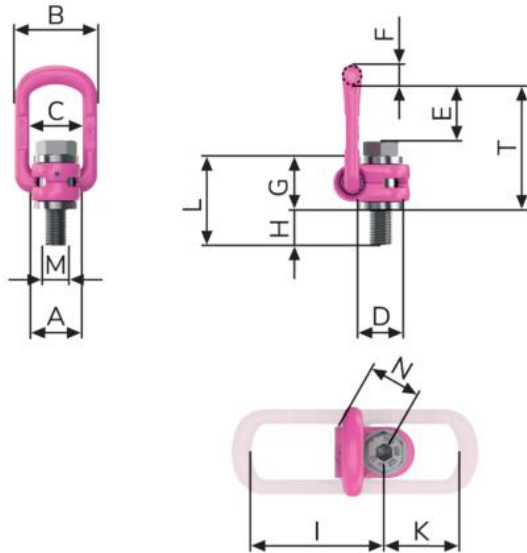

weight	0.34 kg	0.75 lbs
Nominal WLL	1000 kg	2200 lbs
T	75 mm	2-15/16"
A	32 mm	1-1/4"
B	54 mm	2-1/8"
C	34 mm	1-11/32"
D	26 mm	1"
E	38 mm	1-1/2"
F	10 mm	3/8"
G	29 mm	1-5/32"
H	21 mm	13/16"
I	75 mm	2-15/16"
K	45 mm	1-25/32"
L	50 mm	1-31/32"
M	M12 mm	M12
N	32 mm	1-1/4"