

## VLBS-P 4t - Load ring with spring for welding, especially for pipes

Artikel-Nr: 7995472




Universal Lifting point for welding with a diverse operating range in engineering and plant manufacturing.

- Suspension ring with optimised function form for a better support at side loading and protection of the clamping spring.
- Suspension ring pivots 180°. Suspension ring with enlarged pivoting area.
- 100 % WLL at 90° in the load ring plane possible.
- Clamping spring works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lashing mean possible.
- Distance knobs at the weld-on block to achieve the necessary distance for the root weld.
- Clear marking of the minimum WLL for all loading directions. Simple and process safe positioning for the welding of pre-assembled components consisting of suspension ring and weld-on blocks. Weld:
  - The weld-on-block is made (forged) out of a good weldable steel.
  - Component according to the test criterias of BG/DGUV "GS-HM 36".
  - Significant product characteristics of the VLBS are subject to property right claims.
  - For tube diameter 82-220 mm (at bigger diameters the standard version of the VLBS can be used).

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## VLBS-P 4t - Load ring with spring for welding, especially for pipes

Artikel-Nr: 7995472

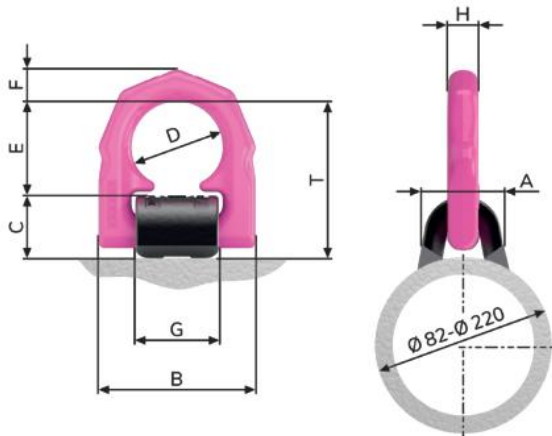

|                    |         |          |
|--------------------|---------|----------|
| <b>weight</b>      | 0.76 kg | 1.68 lbs |
| <b>Nominal WLL</b> | 4000 kg | 8820 lbs |
| <b>T</b>           | 87 mm   | 3-7/16"  |
| <b>A</b>           | 45 mm   | 1-25/32" |
| <b>B</b>           | 87 mm   | 3-7/16"  |
| <b>C</b>           | 35 mm   | 1-3/8"   |
| <b>D</b>           | 51 mm   | 2"       |
| <b>E</b>           | 52 mm   | 2-1/16"  |
| <b>F</b>           | 18 mm   | 23/32"   |
| <b>G</b>           | 46 mm   | 1-13/16" |
| <b>H</b>           | 16,5 mm | 21/32"   |