

VIP-Balancer VW-20

Artikel-Nr: 7904725




VIP-Balancers will be installed into 4-leg sling assemblies (2x 2-leg), to achieve an equal load distribution to all 4 legs. The length tolerances of the single legs will be compensated. You can calculate with 4 load bearing strands if the following criteria are fulfilled (DGUV rule 109-017):

- Two 2-leg slings, thereof one sling with a balancer.
- Both 2-leg slings will be attached to one hook (single or double crane hook)
- Symmetrical load spreading
- Max. inclination angle β 45°

Other important RUD specific information and specialities to our VIP-Balancers can be found in the specific user instruction !

VIP-Balancer VW-20

Artikel-Nr: 7904725

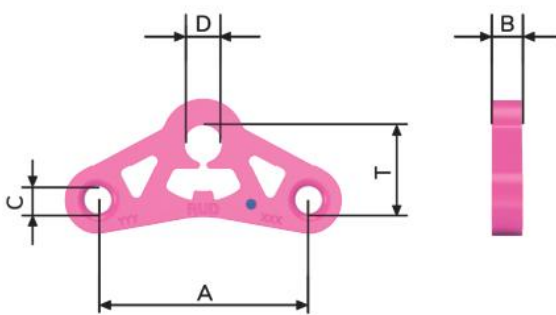

weight	10.74 kg	23.68 lbs
T	129 mm	4-27/32"
A	300 mm	11-13/16"
B	40 mm	1-9/16"
C	40 mm	1-9/16"
D	54 mm	1-5/8"