

Excavator hook welded VABH-W 4t

Artikel-Nr: 7991210




Used as a lifting point for spreader bars, wire rope slings, round slings, lifting means: oval suspension ring.

- Can be combined with most commercial lifting means without additional connecting element.
- Patented markings for easy determination for withdraw of service.
- Robust, forged safety latch.
- Phosphated surface.
- Weld-on point can be used as excavator hook.
- Simple and fast welding installation.
- Material of weld-on-block 1.6541 (23MnNiCrMo52) Weld: Kehlnaht 6 (please observe user instruction).
- Area of application in ring plane: 150°, Area of application at lateral load: +45°, -45°
- corresponds with the test criteria: "GS-HM-36"

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Excavator hook welded VABH-W 4t

Artikel-Nr: 7991210

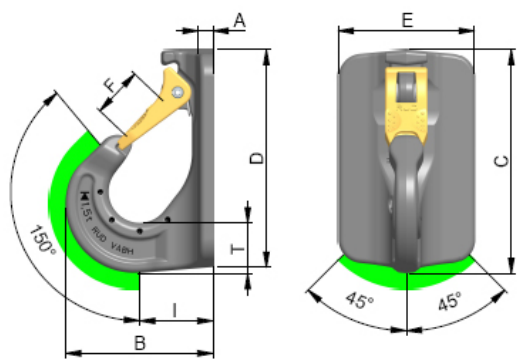

weight	2.95 kg	6.50 lbs
Nominal WLL	4000 kg	8820 lbs
T	40 mm	1-9/16"
A	11 mm	7/16"
B	119 mm	4-11/16"
C	168 mm	6-5/8"
D	164 mm	6-15/32"
E	104 mm	4-3/32"
F	35 mm	1-3/8"
I	59 mm	2-15/16"