

Eye nut RM - M10

Artikel-Nr: 55258




For the RUD RM - eye nuts, the threaded connector component must be of at least quality grade 8.8

- Considerably higher WLL (in comparison to DIN 582) at vertical load.
- Large thread and WLL range (M6-M48, 0.1 t – 8 t).
- Clear marking of the minimum WLL for all loading directions.
- Quick and easy installation with just one bolt connection.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Eye nut RM - M10

Artikel-Nr: 55258

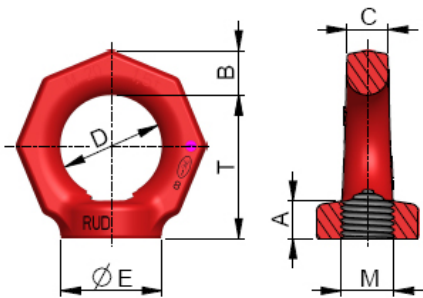

weight	0.10 kg	0.22 lbs
Nominal WLL	250 kg	550 lbs
T	34 mm	1-11/32"
A	11 mm	7/16"
B	11 mm	7/16"
C	10 mm	3/8"
D	25 mm	63/64"
E	25 mm	63/64"
M	M10 mm	M10