

Load ring VLBG-4t-M24 with 10.9 bolt


Artikel-Nr: 7908058



- WLL range 0.3 t – 4 t.
- Captive but replaceable 10.9 screw.
- Clamping spring has a noise-dampening effect and keeps the hanging eye in the desired direction; This makes it easy to hook in the sling or flat design when folded down.
- DNVGL certification is compliant with:
DNV GL standard DNVGL-ST-0377 - Standard for shipboard lifting appliances
DNV GL standard DNVGL-ST-0378 - Standard für offshore and platform lifting appliances.

Load ring VLBG-4t-M24 with 10.9 bolt

Artikel-Nr: 7908058

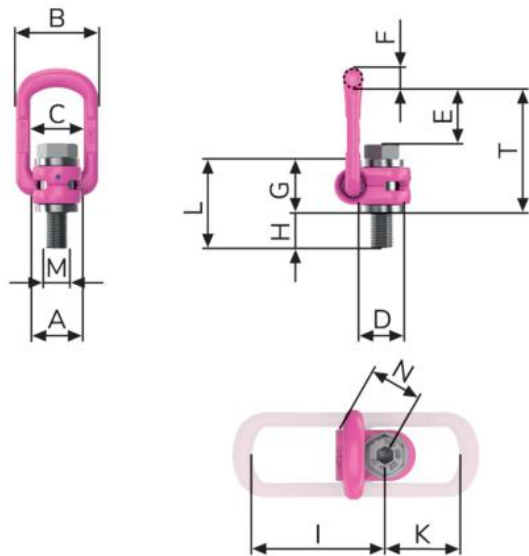

weight	1.40 kg	3.09 lbs
Nominal WLL	4000 kg	8820 lbs
T	125 mm	4-15/16"
A	50 mm	1-31/32"
B	82 mm	3-1/4"
C	54 mm	2-1/8"
D	45 mm	1-25/32"
E	67 mm	2-5/8"
F	18 mm	23/32"
G	43 mm	1-11/16"
H	37 mm	1-7/16"
I	130 mm	5-1/8"
K	78 mm	3-1/16"
L	80 mm	3-1/8"
M	M24 mm	M24
N	48 mm	1-7/8"