

STARPOINT VRS-20t-M64

Artikel-Nr: 7907509




- Lifting points pivots 360°. Easy adjustment in load direction.
- Not exchangeable RUD-Bolt (this reduces the usage of improper standard bolts).
- Clear marking of the minimum WLL for all loading directions. Higher WLL possible when location and installation is optimised (compare WLL chart / product information).
- Clear marking at the bolt head: RUD, thread size, batch-no.
- Available as: – Standard Metric Thread (DIN EN 13)
- Significant product characteristics of the VRS are subject to property right claims.
- Component according to the test criterias of BG/DGUV “GS-HM 36”.
- Complying with the US-Standard (ASME B30.26). Quick and easy installation with just one bolt connection.
- For permanent installation and recurrend lifts we can offer a special socket wrench to apply the requested torque (fits to a common Inch torque wrench).

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

STARPOINT VRS-20t-M64

Artikel-Nr: 7907509

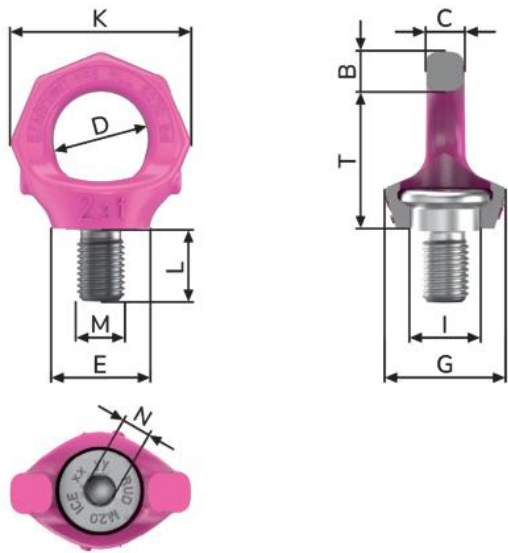

weight	16.41 kg	36.18 lbs
Nominal WLL	20000 kg	44090 lbs
T	177 mm	6-31/32"
B	55 mm	2-5/32"
C	49 mm	1-15/16"
D	120 mm	4-3/4"
E	121 mm	4-3/4"
G	158 mm	6-1/4"
I	90 mm	3-17/32"
K	229 mm	9"
L	96 mm	3-25/32"
M	M64 mm	M64
N	36 mm	1-27/64"