

Excavator hook welded VCGH-S 20

Artikel-Nr: 7984310




Used as a lifting point for spreader bars, wire rope slings, round slings, lifting means: oval suspension ring.

- Can be combined with most commercial lifting means without additional connecting element.
- Patented markings for easy determination for withdraw of service.
- Robust, forged safety latch.
- Phosphated surface.
- Weld-on point can be used as excavator hook.
- Simple and fast welding installation.
- The weld-on-block is made (forged) out of quality weldable steel. Weld: Kehlnaht 8
- Area of application in ring plane: 45°, Area of application at lateral load: +15°, -15°
- corresponds with the test criteria: "GS-HM-36"

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Excavator hook welded VCGH-S 20

Artikel-Nr: 7984310

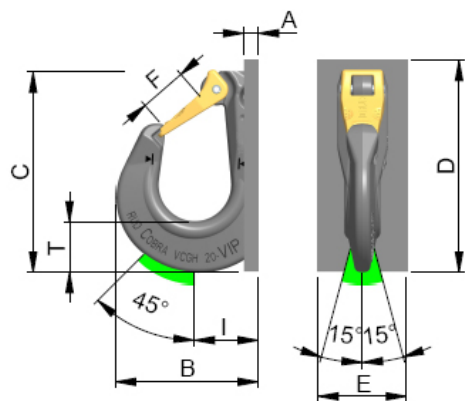

weight	8.40 kg	18.52 lbs
Nominal WLL	16000 kg	35270 lbs
T	69 mm	2-23/32"
A	20 mm	3/4"
B	187 mm	7-3/8"
C	272 mm	10-11/16"
D	288 mm	11-11/32"
E	120 mm	4-3/4"
F	63 mm	2-15/32"
I	87 mm	3-7/16"
N	20 mm	null