

Lashing Point Welding LPW-U 8000 daN with spring

Artikel-Nr: 7992226




Original VIP-Quality

- Clear marking of the lashing capacity for all loading directions. LC marking with daN.
- Suspension ring pivots 180°.
- Distance knobs at the weld-on block to achieve the necessary distance for the root weld.
- Simple and process safe positioning for the welding of pre-assembled components consisting of suspension ring and weld-on blocks.
- The weld-on-block is made (forged) out of quality weldable steel.
- Clamping spring works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lashing mean possible.
- Suspension ring with optimised function form for a better support at side loading and protection of the clamping spring.
- Phosphated surface.

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Lashing Point Welding LPW-U 8000 daN with spring

Artikel-Nr: 7992226

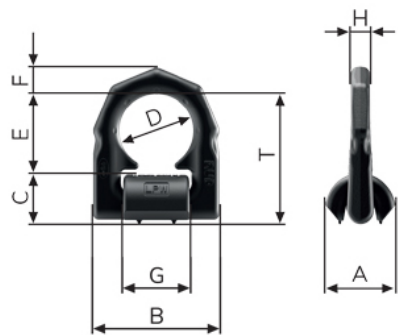

weight	0.80 kg	1.76 lbs
T	83 mm	3-1/4"
A	42 mm	1-21/32"
B	87 mm	3-7/16"
C	31 mm	1-7/32"
D	51 mm	2"
E	52 mm	2-1/16"
F	18 mm	23/32"
G	46 mm	1-13/16"
H	16 mm	5/8"
Lashing capacity	8000 daN	null