

Load Ring VRBS welded on boltable plate VRBG-31,5t

Artikel-Nr: 7910387




Load ring threaded with full working load in all directions and split force introduction.

- Split force introduction due to multiple point fixing.
- Suspension ring pivots 180°.
- 100% WLL at 90 degrees in the load ring plane possible.
- Clear marking of the minimum WLL for all loading directions.
- Patented markings for easy determination for withdraw of service.
- Original RUD bolt available as spare part.
- Component according to the test criterias of DGUV "GS-HM-36".
- Assembly with allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift. Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Load Ring VRBS welded on boltable plate VRBG-31,5t

Artikel-Nr: 7910387

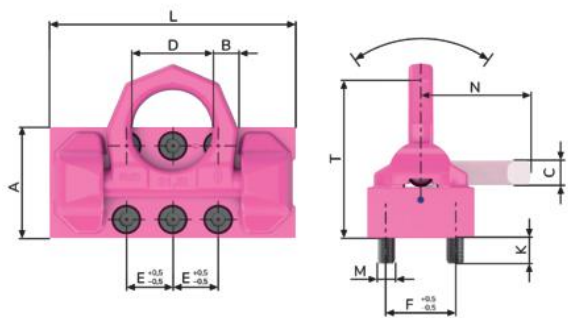

weight	66.35 kg	146.28 lbs
Nominal WLL	31500 kg	69440 lbs
T	265 mm	10-7/16"
A	180 mm	7-1/16"
B	42 mm	1-21/32"
C	42 mm	1-21/32"
D	130 mm	5-1/8"
E	75 mm	2-15/16"
F	120 mm	4-3/4"
K	46 mm	1-13/16"
L	400 mm	15-3/4"
M	M30 mm	M30
N	195 mm	7-11/16"