

Eye nut RM - M30

Artikel-Nr: 55438




For the RUD RM - eye nuts, the threaded connector component must be of at least quality grade 8.8

- Considerably higher WLL (in comparison to DIN 582) at vertical load.
- Large thread and WLL range (M6-M48, 0.1 t – 8 t).
- Clear marking of the minimum WLL for all loading directions.
- Quick and easy installation with just one bolt connection.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Eye nut RM - M30

Artikel-Nr: 55438

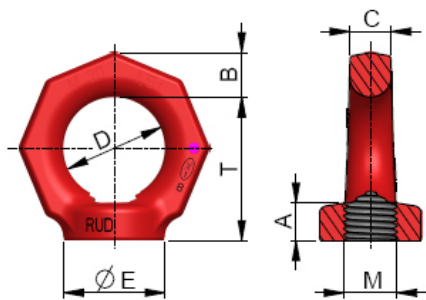

weight	1.32 kg	2.91 lbs
Nominal WLL	3000 kg	6610 lbs
T	85 mm	3-11/32"
A	25 mm	63/64"
B	26 mm	1"
C	24 mm	15/16"
D	60 mm	2-3/8"
E	60 mm	2-3/8"
M	M30 mm	M30