

## Eye nut RM - M18

Artikel-Nr: 55342




For the RUD RM - eye nuts, the threaded connector component must be of at least quality grade 8.8

- Considerably higher WLL (in comparison to DIN 582) at vertical load.
- Large thread and WLL range (M6-M48, 0.1 t – 8 t).
- Clear marking of the minimum WLL for all loading directions.
- Quick and easy installation with just one bolt connection.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Eye nut RM - M18

Artikel-Nr: 55342

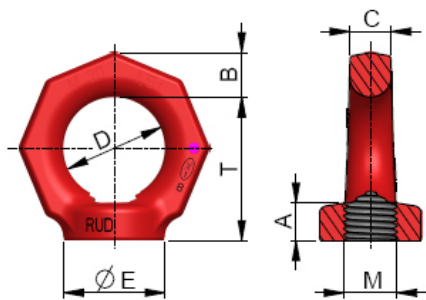

|             |         |          |
|-------------|---------|----------|
| weight      | 0.39 kg | 0.88 lbs |
| Nominal WLL | 1200 kg | 2640 lbs |
| T           | 55 mm   | 2-5/32"  |
| A           | 16 mm   | 5/8"     |
| B           | 17 mm   | 43/64"   |
| C           | 16 mm   | 5/8"     |
| D           | 40 mm   | 1-9/16"  |
| E           | 40 mm   | 1-9/16"  |
| M           | M18 mm  | M18      |