

Load ring VLBG-PLUS 3,5t M20 with ICE-bolt

Artikel-Nr:

8504657




- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **optimal WLL with captive but exchangeable ICE-Bolt** made out of patented steel with special corrosion protection Corrud-DT. Non-hazardous deep temperature usage down to -60°; higher toughness and therefore higher bending strength as well as less wear occurrence. Original ICE-Bolt is available as a spare part. Clear marking at the bolt head: RUD, ICE, thread size, batchno., class of strength.
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectively flat design if turned down.
- **Clear marking of the minimum WLL for all loading directions**
- Available as:
 - Standard Metric Thread (DIN EN 13)
- Variable bolt lengths available for tapped or through holes.
- Tested and certified by DGUV Testing specifications: GS-HM-36:2021-09
Certificate No.: HM 220053
- DNV certification from size M30.
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Load ring VLBG-PLUS 3,5t M20 with ICE-bolt

Artikel-Nr: 8504657

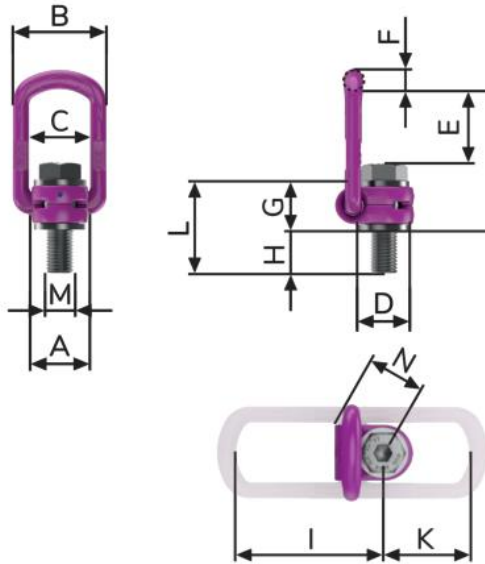

weight	1.30 kg	2.87 lbs
Nominal WLL	3500 kg	7700 lbs
T	110 mm	4-11/32"
A	50 mm	1-31/32"
B	82 mm	3-1/4"
C	54 mm	2-1/8"
D	45 mm	1-25/32"
E	55 mm	2-5/32"
F	17 mm	43/64"
G	43 mm	1-11/16"
H	32 mm	1-1/4"
I	113 mm	4-7/16"
K	64 mm	2-1/2"
L	75 mm	2-15/16"
M	M20 mm	M20
N	48 mm	1-7/8"