

VWBG-V 0,6t-M12 : anneau émerillon à maillon, vis longueur standard

Artikel-Nr: 7100180




- Ball bearing for a shock-free rotating and turning with less friction.
- Lifting points pivots 360°.
- Suspension ring with enlarged pivoting area.
- Comprehensive range of threads and WLL (M8 – M30 bzw. 0,3 t – 5 t).
- Available as:
 - Standard Metric Thread (DIN EN 13)
 - Metric Fine Thread (DIN EN 13)
 - Coarse Pitch Thread UNC (ANSI B1.1)
- Clear marking of the minimum WLL for all loading directions. Higher WLL possible when location and installation is optimised(compare WLL chart / product information).
- Patented markings for easy determination for withdraw of service as well as the determination of the load angle.
- Rotatable at nominal WLL, 90° to the bolt-on direction.
- Variable bolt lengths available for tapped or through holes.
- Large distance between bolt-on surface and load to avoid damage.
- Non removable special bolt (this reduces the risk of improper standard bolts).
- Tested and certified by DGUV Testing specifications: GS-HM-36:2021-09
Certificate No.: HM 220055
- Quick and easy installation with just one bolt connection.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

VWBG-V 0,6t-M12 : anneau émerillon à maillon, vis longueur standard

Artikel-Nr: 7100180

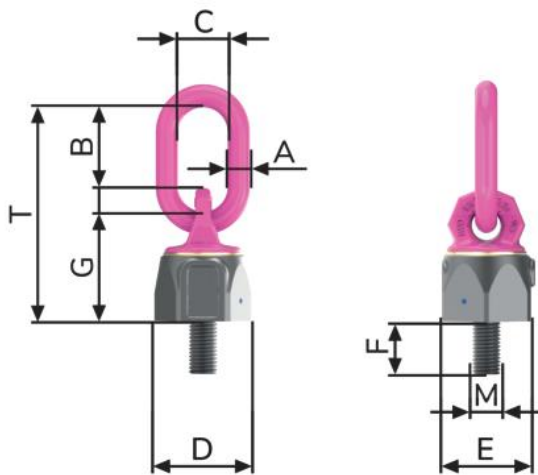

poids	0.44 kg	0.90 lbs
CMU	600 kg	1320 lbs
T	107 mm	4-7/32"
A	10 mm	3/8"
B	49 mm	null
null	1-15/16"	null
C	35 mm	1-3/8"
D	42 mm	1-21/32"
E	36 mm	1-27/64"
F	21 mm	13/16"
G	47 mm	1-7/8"
M	M12 mm	M12