

ACP-TURNADO MAX 24t M52

Artikel-Nr: 7912631



The RUD ACP-TURNADO MAX sets new standards for the safe lifting of valuable loads. Thanks to its innovative, optimally protected internal spring mechanism, its lift bail immediately turns into the load direction when the load is lifted, so it cannot remain vertical. Dangerous transverse loads and a sudden drop of the load by sudden turning into the load direction are therefore impossible.


Your benefits:

- Innovative, optimally protected internal spring mechanism – prevents vertical stopping of the lift bail.
- Deflector disc with angle marking, WLL information in “t” and “lbs”, safety factors, and torque moment.
- Threaded pin – firmly connected.
- Free space for individual marking/stamp.
- Integrated RFID transponder to make checks easier.
- Swivel joint in the lifting ring axis.
- Wear lenses for checking discard criteria.

Other important RUD specific information and specialties to our RUD lifting points can be found in the specific user instruction.

ACP-TURNADO MAX 24t M52

Artikel-Nr: 7912631

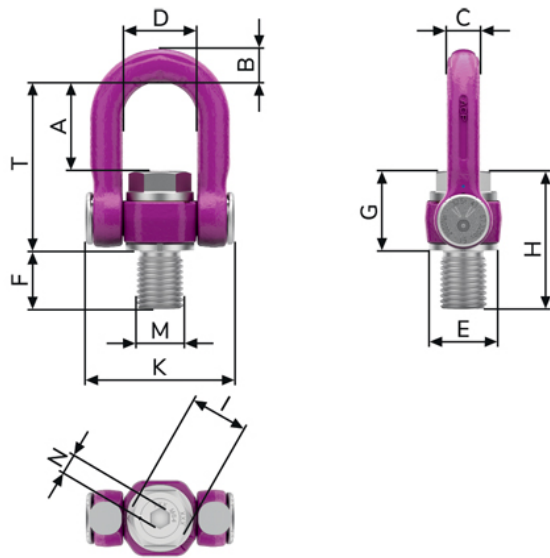

weight	16.34 kg	36.02 lbs
Nominal WLL	24000 kg	42320 lbs
T	232 mm	9-1/8"
A	123,5 mm	4-7/8"
B	40 mm	1-9/16"
C	40 mm	1-9/16"
D	103 mm	4-1/16"
E	95 mm	3-3/4"
F	65 mm	2-9/16"
G	108 mm	4-1/4"
H	173 mm	6-13/16"
I	75 mm	2-15/16"
K	204 mm	8-1/32"
L	145 mm	5-11/16"
M	M52 mm	M52
N	24 mm	15/16"