

Load ring VLBG-PLUS 15t M42 with RUD-bolt

Artikel-Nr: 7982966




- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **Captive but exchangeable RUD-Bolt** with special corrosion protection Corrud-DT. Original RUD-Bolt is available as a spare part. Clear marking at the bolt head: RUD, thread size, batchno., class of strength.
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectively flat design if turned down.
- **Clear marking of the minimum WLL** for all loading directions.
- Available as:
 - Standard Metric Thread (DIN EN 13)
 - Metric Fine Thread (DIN EN 13)
 - Coarse Pitch Thread UNC (ANSI B1.1)
 - Fine Thread UNF (ANSI B1.1)
- Variable bolt lengths available for tapped or through holes.
- Tested and certified by DGUV Testing specifications: GS-HM-36:2021-09
Certificate No.: HM 220053
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning Actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Load ring VLBG-PLUS 15t M42 with RUD-bolt

Artikel-Nr: 7982966

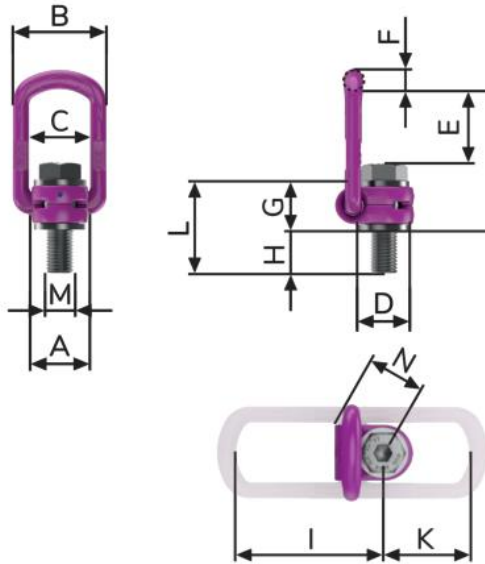

weight	10.90 kg	24.03 lbs
Nominal WLL	15000 kg	33070 lbs
T	222 mm	8-3/4"
A	95 mm	3-3/4"
B	156 mm	6-5/32"
C	100 mm	3-15/16"
D	85 mm	3-11/32"
E	109 mm	4-5/16"
F	36 mm	1-27/64"
G	87 mm	3-7/16"
H	63 mm	2-15/32"
I	230 mm	9-1/16"
K	130 mm	5-1/8"
L	150 mm	5-7/8"
M	M42 mm	M42
N	100 mm	3-15/16"