

ICE-VSK-KK-6

Artikel-Nr: 7901307



A problem often occurring with direct lashing is the fact that no adequate lashing points are available at the load or the connection dimensions of the existing "lashing points" (often just holes) do not allow a correct attachment of the lashing hook.

Attention:

- The safety latch of the lashing hook should be closed in hooked-in condition!
- Lashing hook must only be loaded in the hook ground, never at the tip!

To adjust the lashing means to non adequate lashing points, the use of a shackle often causes problems since the shackles will be submitted to forbidden bending forces. An even better and especially flexible alternative is the endless chain.

A endless chain should be selected in the same nominal size and quality class as the lashing chain; thanks to the "doubling" of the chain, sharp edges at the endless chain will no longer represent a problem.

A special flexible endless chain can be generated by the ICE-Multi shortening claw, by just connecting a piece of ICE-chain (chain length $L = 1000 \text{ mm}$) with the ICE-Multi shortening claw to a closed loop.


Special Advantages:

- The endless chain can be opened without tools and
- can be adjusted in its loop diameter.

Typical "direct lashing loads" without lashing points are stone blocks or concrete parts. By using a endless chain, a so-called "spring lashing" can be effected.

ICE-VSK-KK-6

Artikel-Nr: 7901307

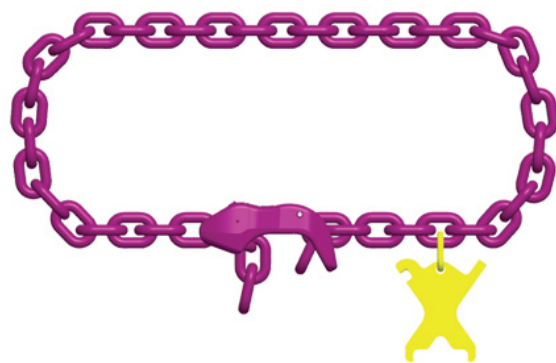

weight	1.20 kg	2.65 lbs
T	500 mm	19-11/16"
L	1000 mm	39-3/8"
Lashing capacity	3600 daN	null