

## So-PowerPoint PP-VIP6-1,3t-M16X1,5 with variable length

Artikel-Nr:

8600321



Thread reach from  $F = 16-70 \text{ mm}$  is available. (with through thread)

When ordering implicitly indicate the required length.

Connection only with RUD approved components e.g; VCÖH-6, oval link, PP 1,3t or the 6 mm VIP chain.


Hint : The VIP chain connection is fool proof. When assembling the components, pay attention to the correct WLL allocation.

- **Can be combined with most commercial lifting means without additional connecting element.**
- **Lifting points pivots  $360^\circ$ .**
- **Large distance between bolt-on surface and load to avoid damage.**
- **Rotatable at nominal WLL,  $90^\circ$  to the bolt-on direction**Lowest kinking possibility due to cardan joint.
- **Suspension ring with enlarged pivoting area.**
- Clear marking of the minimum WLL for all loading directions.
- Variable thread lengths are available for use of threaded holes and through hole fixtures.
- Non removable special bolt (this reduces the risk of non standard bolts).
- Component according to the test criterias of BG/DGUV "GS-HM 36".
- Quick and easy installation with just one bolt connection.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

So-PowerPoint PP-VIP6-1,3t-M16X1,5 with variable length

Artikel-Nr: 8600321

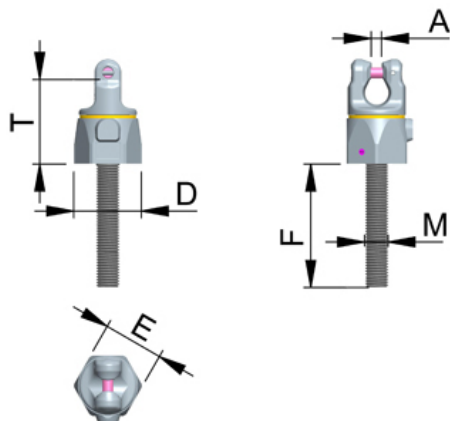

|             |            |                |
|-------------|------------|----------------|
| Nominal WLL | 1300 kg    | 2860 lbs       |
| T           | 58 mm      | 2-9/32"        |
| A           | 6 mm       | 15/64"         |
| D           | 48 mm      | 1-7/8"         |
| E           | 41 mm      | 1-5/8"         |
| F           | 16-70 mm   | 5/8" to 2-3/4" |
| M           | M16X1,5 mm | M16x1,5        |