

Eye Plate-threaded VRBG-10t

Artikel-Nr: 7994537




Load ring threaded with full working load in all directions and split force introduction.

- Split force introduction due to multiple point fixing.
- Suspension ring pivots 180°.
- 100% WLL at 90 degrees in the load ring plane possible.
- Clear marking of the minimum WLL for all loading directions.
- Patented markings for easy determination for withdraw of service.
- Original RUD bolt available as spare part.
- Component according to the test criterias of DGUV "GS-HM-36".
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Eye Plate-threaded VRBG-10t

Artikel-Nr: 7994537

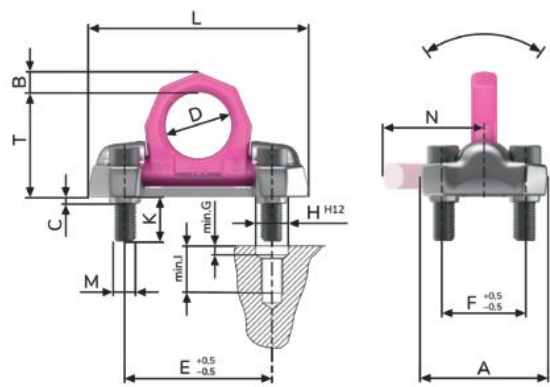

weight	5.43 kg	11.97 lbs
Nominal WLL	10000 kg	22040 lbs
T	103 mm	4-1/16"
A	125 mm	4-15/16"
B	22 mm	7/8"
C	6 mm	15/64"
D	65 mm	2-9/16"
E	143 mm	5-5/8"
F	78 mm	3-1/16"
G	8 mm	5/16"
H	30 mm	1-3/16"
I	50 mm	1-31/32"
K	43 mm	1-11/16"
L	213 mm	8-3/8"
M	M20 mm	M20
N	100 mm	3-15/16"