

STARPOINT eye nut VRM-M30

Artikel-Nr: 7993008




- Lifting points pivots 360° for an easy adjustment in load direction.
- Clear marking of the minimum WLL for all loading directions.
- The WLL statement corresponds to the minimum WLL in all loading directions. Higher WLL possible when location and installation is optimised (compare WLL chart).
- Available as: – Standard Metric Thread M6-M30 (DIN EN 13)
- Special coating on request.
- Component according to the test criterias of DGUV “GS-HM-36”.
- Quick and easy installation with just one bolt connection.
- Hand tightening with appropriate wrench is sufficient for a singular lift.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

STARPOINT eye nut VRM-M30

Artikel-Nr: 7993008

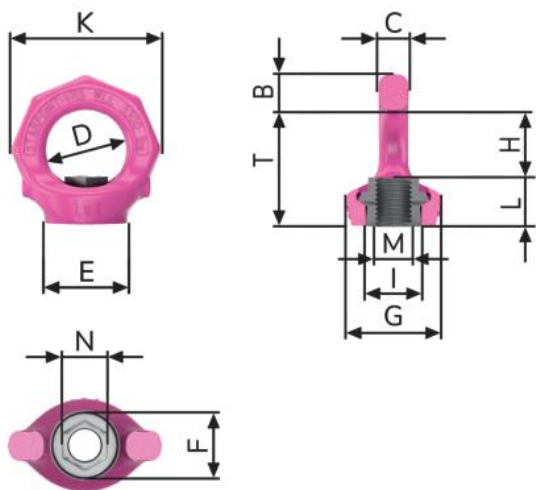

weight	1.32 kg	2.91 lbs
Nominal WLL	4500 kg	9920 lbs
T	87 mm	3-7/16"
B	26 mm	1"
C	24 mm	15/16"
D	60 mm	2-3/8"
E	66 mm	2-5/8"
F	56 mm	2-3/16"
G	75 mm	2-15/16"
H	51 mm	2"
I	44 mm	1-3/4"
K	114 mm	4-1/2"
L	36 mm	1-27/64"
M	M30 mm	M30
N	36 mm	1-27/64"