

ISO pipe fitting

Elbow

Design features

- With internal thread according to ISO 228, ductile iron
- With internal thread according to EN 10226-1, POM

Order No.	Ø Pipe	Thread	MOP (PN)	L	E	ØD	Weight
6410	25	¾"	16	71	58	44	0,38
	32	1"		87	70	53	0,70
	40	1¼"		106	84	65	1,17
	50	1½"		141	101	76	1,50
	63	2"		163	114	94	2,75

Order No.	Ø Pipe	Thread	MOP (PN)	L	E	ØD	Weight
6430	20	½"	16	60	48	39	0,07
	25	¾"		71	58	43	0,10
	32	¾"		87	70	53	0,13
	32	1"		87	70	53	0,14
	40	1¼"		103	82	72	0,28
	50	1½"		137	99	83	0,42
	63	2"		145	110	99	0,67

Design feature

- With external thread according to EN 10226-1

Order No.	Ø Pipe	Thread	MOP (PN)	L	E	ØD	Weight
6460	25	¾"	16	71	58	44	0,40
	32	1"		87	70	53	0,56
	40	1¼"		104	84	65	1,10
	50	1½"		141	101	76	1,70
	63	2"		163	114	94	2,52

Order No.	Ø Pipe	Thread	MOP (PN)	L	E	ØD	Weight
6470	25	1"	16	82	70	44	0,57
	32	1¼"		90	70	53	0,60
	32	1½"		90	70	53	0,90
	32	2"		87	70	53	0,69
	40	1½"		141	101	76	1,10

Design feature

- With external thread according to EN 10226-1

Order No.	Ø Pipe	Thread	MOP (PN)	L	E	ØD	Weight
6411	32	1"	16	77	70	53	0,55
	32	2"		78	70	53	0,59

Design features


- With external thread according to EN 10226-1
- ISO socket 360° rotatable

Order No.	Ø Pipe	Thread	MOP (PN)	L	E	ØD	Weight
6462	63	1½"	16	148	105	93	2,65

Elbow 90° With internal thread

No. 6410 Made of ductile iron

No. 6430 Made of POM

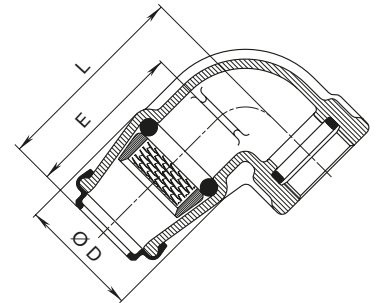


Elbow 90° With external thread

No. 6460 Made of ductile iron


90° elbow with external thread reduced

No. 6470 Made of ductile iron

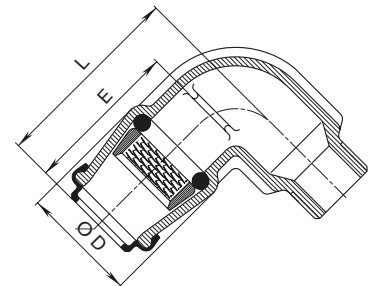

Elbow 45° With external thread

No. 6411 Made of ductile iron



Elbow 90° Swivelling fitting, with external thread

No. 6462 Made of ductile iron

