

## Eye Plate, ready for welding VRBS-31,5t

Artikel-Nr: 60267




- Split force introduction due to multiple point fixing.
- Suspension ring pivots 180°.
- 100% WLL at 90° in the load ring plane possible.
- Patented markings for easy determination for withdraw of service. Patented markings for determination of the load angle.
- Clear marking of the minimum WLL for all loading directions.
- The weld-on-block is made (forged) out of a quality weldable steel.
- Component according to the test criterias of DGUV "GS-HM-36".
- Simple and fast welding installation.
- Confirmation of the low temperature ability to -40°C by the notch bar impact test is possible upon request (before order is placed).

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Eye Plate, ready for welding VRBS-31,5t

Artikel-Nr: 60267

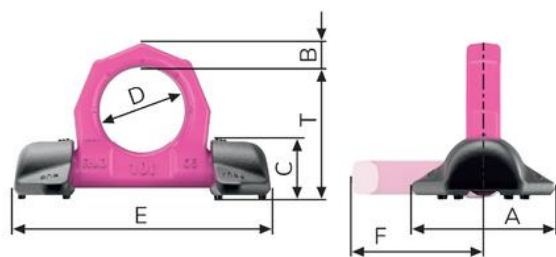

|             |          |           |
|-------------|----------|-----------|
| weight      | 15.60 kg | 34.39 lbs |
| Nominal WLL | 31500 kg | 69440 lbs |
| T           | 178 mm   | 7"        |
| A           | 160 mm   | 6-13/32"  |
| B           | 42 mm    | 1-21/32"  |
| C           | 78 mm    | 3-1/16"   |
| D           | 130 mm   | 5-1/8"    |
| E           | 373 mm   | 14-11/16" |
| F           | 195 mm   | 7-11/16"  |