

## So-PowerPoint PP-VIP10-3,5t-M24X1,5 with variable length

Artikel-Nr:

8600323



Thread reach from  $F = 24-95 \text{ mm}$  is available. (with through thread)

When ordering implicitly indicate the required length.

Connection only with RUD approved components e.g; VCÖH-10, oval link, PP 3,5t or the 10 mm VIP chain.


Hint : The VIP chain connection is fool proof. When assembling the components, pay attention to the correct WLL allocation.

- **Can be combined with most commercial lifting means without additional connecting element.**
- **Lifting points pivots  $360^\circ$ .**
- **Large distance between bolt-on surface and load to avoid damage.**
- **Rotatable at nominal WLL,  $90^\circ$  to the bolt-on direction**Lowest kinking possibility due to cardan joint.
- **Suspension ring with enlarged pivoting area.**
- Clear marking of the minimum WLL for all loading directions.
- Variable thread lengths are available for use of threaded holes and through hole fixtures.
- Non removable special bolt (this reduces the risk of non standard bolts).
- Component according to the test criterias of BG/DGUV "GS-HM 36".
- Quick and easy installation with just one bolt connection.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

So-PowerPoint PP-VIP10-3,5t-M24X1,5 with variable length

Artikel-Nr: 8600323

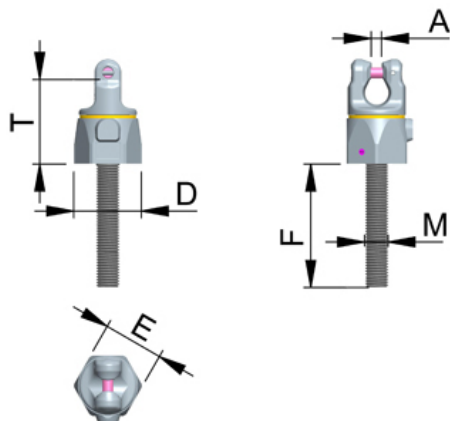

|             |            |              |
|-------------|------------|--------------|
| weight      | 0.00 kg    | null         |
| Nominal WLL | 3500 kg    | 7700 lbs     |
| T           | 94 mm      | 3-11/16"     |
| A           | 10 mm      | 13/32"       |
| D           | 81 mm      | 3-3/16"      |
| E           | 70 mm      | 2-3/4"       |
| F           | 24-95 mm   | 1" to 3-3/4" |
| M           | M24X1,5 mm | M24x1,5      |